


VW Model 181 Emergency Flasher Switch Wiring Detail

Volkswagen Emergency Flasher Switch (E3)

Part no. 111 953 235 G

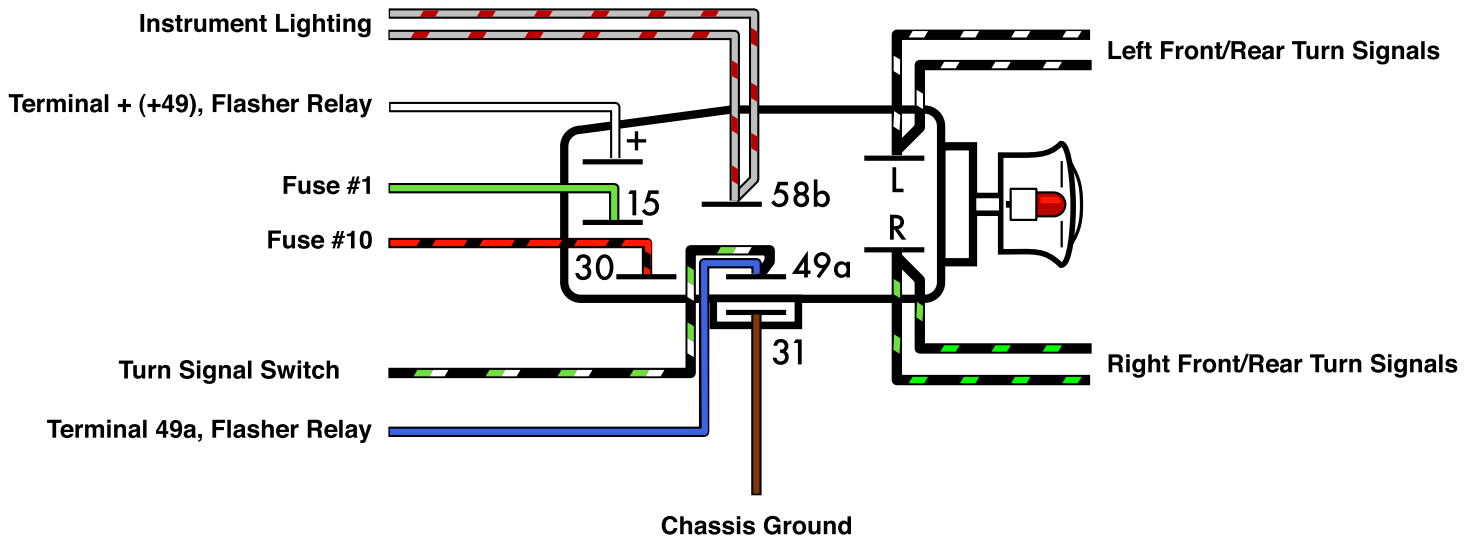

Emergency Flasher Switch Alternate Wiring Detail

The diagram above represents the correct wiring for Things imported to North America in the '73-'74 model years. However, at the time of this writing, several Thing parts vendors are offering a different part for the emergency flasher switch, hence the alternate wiring description below. The substitute switch has a Type 2 part number and is slightly different. It has two terminals marked 54 and 54f. In the years in which that switch was used on busses, terminal 54 was used to flash the brake lights, as there were no separate rear turn signal lights on those models. The substitute switch is missing terminal 58b, whose job it is to illuminate the switch knob when the instrument lights are on. The only deficit of using this switch is that the emergency flasher switch knob will not be lighted with the rest of the instruments and knobs.

Do not connect the gray/red wire to either terminal 54 or 54f. Instead, insulate the connector to protect against short circuits.

Volkswagen Emergency Flasher Switch (E3)

Part no. 211 953 235 A

