



# The Volkswagen LT.




## Technical Data and Equipment.

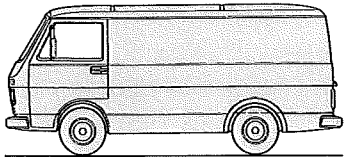


Delivery van

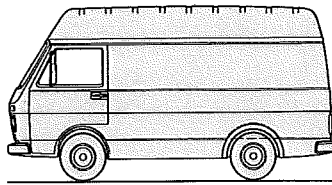


High-roof delivery van

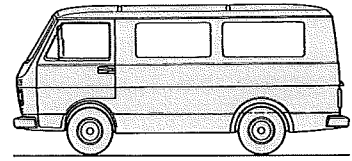


Kombi

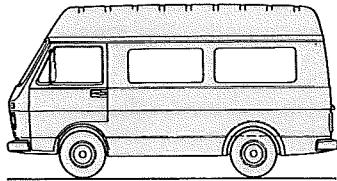


High-roof Kombi

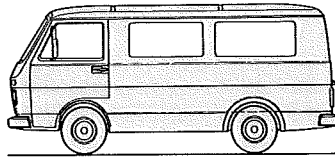


Bus

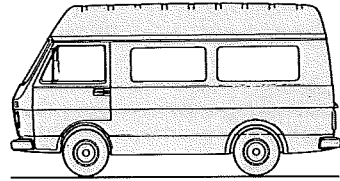


High-roof Bus

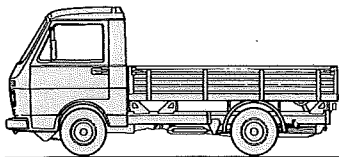


Pick-up

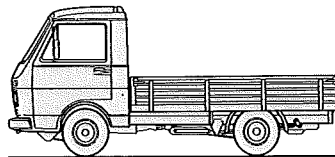


Low-loader pick-up

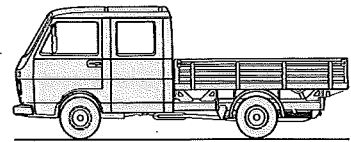


Double-cab pick-up

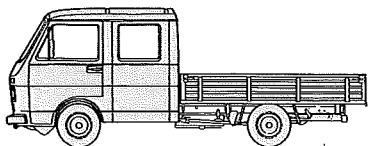

Low-loader pick-up  
with double cab

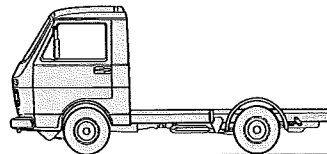

Chassis with cab

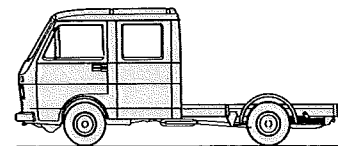

Chassis with  
double cab

## Standard equipment for all LT models

### External equipment

Single-colour paintwork  
Front towing lug (LT 28/31/35)  
Rear towing lug  
Towing coupling in front bumper (LT 40/45/50/55)  
Halogen headlights  
Two large convex outside mirrors on brackets  
Wheel trim covers (LT 28/31)  
Front wheel and hub caps (LT 35/40/45/50/55)  
Safety outside door handles  
Lockable fuel filler  
Wheel chock (LT 40/45/50/55)  
Reversing lights

### Cab

Leatherette seat upholstery  
Plastic roof lining  
Cab entrance step  
Rubber mat covering for floor and entry area  
Individual driver's and front passenger's seats  
Driver's seat and seat back with wide range of positions  
Variable-height driver's seat (LT 40/45/50/55)  
Automatic seat belts for driver's and front passenger's seats (LT 28)  
Anchorage for subsequent seat belt installation  
Safety steering wheel with plastic foam cover  
Non-glare fascia covering  
Storage space for small items in fascia  
Large storage tray on passenger's side  
Ashtray, door trim, door pull handle, safety door lock and passenger's grab handle  
Folding sun visors for driver and front passenger  
Through access to load/main passenger area (not on Pick-up or Chassis with cab)

### Operating equipment

Rectangular headlights in radiator grille  
Self-cancelling turn indicators  
Side turn indicators (on LT 40/45/50/55 with 3650 mm wheelbase)  
Hazard warning flashers  
Windscreen washer  
Two-speed windscreen wipers  
Instrument cluster with:  
Speedometer, distance recorder, tachograph (on LT 40/45/50/55), fuel gauge, coolant temperature gauge with additional warning light, telltale and warning lights for alternator, dynamic engine oil pressure gauge, rapid preheat (diesel engine), turn indicators and high headlight beams.  
Switches for hazard warning flashers, side and headlights; steering-column levers for wash-wipe system, flashing turn indicators and dipped headlights  
Combined heating and ventilation system with 3-speed blower  
Adjustable heated and fresh air outlets in fascia  
Defroster outlets for windscreen and side windows  
Through-flow ventilation with air outlets in cab doors  
Interior light with contact switch on driver's door  
Undersealing  
Cavity protection treatment on lower part of body

## Model-related equipment details Delivery van

Wheelbases: 2500 mm (LT 28/31/35) and 2950 mm (LT 28/31/40/45)  
Two-seater cab with walk-through access to load area  
Sliding door on passenger's side  
Load-area light with contact switch on sliding door  
Access step in load-area floor  
Steel load-area floor  
Reinforcing sections on inside walls  
Large full-width hinged rear doors, opening angles 90° and 180°  
No windows in rear doors

## Model-related equipment details High-roof delivery van

Wheelbases: 2500 mm (LT 28/31/35) and 2950 mm (LT 28/31/40/45)  
Two-seater cab with walk-through access to load area  
Sliding door on passenger's side  
Load-area light with contact switch on sliding door  
Access step in load-area floor  
Steel load-area floor  
Reinforcing sections on inside walls  
Large full-width hinged rear doors, opening angles 90° and 180°  
No windows in rear doors  
Large storage space in roof above cab  
Extra-high hinged rear doors (with 2950 mm wheelbase)

## Model-related equipment details Low-loader pick-up

Wheelbase: 2500 mm  
Two-seater cab  
Three-way hinge-down steel sides and tailboard with safety catches  
Folding step on steel tailboard  
Platform floor with small wheel arches and individually replaceable boards  
Protective varnishing on wooden floor

## Model-related equipment details Double cab

Wheelbases 2950 mm and 3650 mm  
Two-seater cab with walk-through access to rear cab section  
Separate hinged door for rear cab section, with safety lock  
Door pull handle  
Rear access step  
4-person bench seat in rear cab  
Seat belts at all seats (LT 28)  
Anchorage for subsequent seat belt installation  
Door and side panel trims  
Rubber floor mat  
Alternative: without bench seat, without seat belts, without storage compartment under bench seat and without rubber mat  
Three-way hinge-down side and tailboards with safety catches  
Folding step on steel tailboard  
Platform floor with individually replaceable wooden planks  
Protective varnishing on wooden floor

# Principal equipment features

## Model-related equipment details Kombi

Wheelbases: 2500 mm and 2950 mm  
 Two-seater cab with through access to load/main passenger area  
 Four large windows in load/main passenger area  
 Sliding door on passenger's side  
 Access step in load-area floor  
 Steel load-area floor  
 Anchorages for subsequent installation of bench seats and the corresponding seat belts  
 Interior light in load/main passenger area  
 Roof lining and side trims for load/main passenger area  
 Large, full-width hinged rear doors, opening angles 90° and 180°  
 Windows in hinged rear doors

## Model-related equipment details High-roof Kombi

Wheelbases: 2500 mm and 2950 mm  
 Two-seater cab with through access to load/main passenger area  
 Four large windows in load/main passenger area  
 Sliding door on passenger's side  
 Access step in load-area floor  
 Steel load-area floor  
 Anchorages for subsequent installation of bench seats and the corresponding seat belts  
 Interior light in load/main passenger area  
 Without roof lining  
 Additional roof storage space above cab  
 Large, full-width hinged rear doors, opening angles 90° and 180°  
 Windows in hinged rear doors

## Model-related equipment details Pick-up

Wheelbases: 2500 mm, 2950 mm and 3650 mm  
 Two-seater cab  
 Three-way hinge-down steel sides and tailboard with safety catches  
 Folding step on steel tailboard  
 Wooden load platform with individually replaceable planks  
 Protective varnishing on wooden floor  
**Variations for Pick-up with 3650 mm wheelbase**  
 Divided side boards with removable centre post  
 Side reflectors front and rear

## Model-related equipment details Low-loader with double cab

Wheelbase: 2950 mm  
 Two-seater cab with walk-through access to rear cab section  
 Separate hinged door for rear cab section, with safety lock  
 Door pull handle  
 Rear access step  
 4-person bench seat in rear cab  
 Seat belts at all seats (LT 28)  
 Anchorages for subsequent seat belt installation  
 Door and side panel trims  
 Rubber floor mat  
 Alternative: without bench seat, without seat belts, without storage compartment under bench seat and without rubber mat  
 Three-way hinge-down side and tailboards with safety catches  
 Folding step on steel tailboard  
 Platform floor with individually replaceable planks  
 Protective varnishing on wooden floor

## Model-related equipment details Chassis with cab Chassis with double cab Chassis with scuttle

**Chassis with cab and chassis with scuttle**  
 Wheelbases: 2500 mm, 2950 mm and 3650 mm  
 Two-seater cab  
**Chassis with double cab**  
 Wheelbases: 2950 mm and 3650 mm  
 As Double-cab pick-up, but without platform body

## Model-related equipment details Braunschweig LT Bus Wolfsburg LT Bus

Basic model for Braunschweig Bus:  
 LT 31 High-roof delivery van with 2500 mm wheelbase  
 Basic model for Wolfsburg Bus:  
 LT 31 High-roof delivery van with 2950 mm wheelbase  
**The following special equipment for LT Buses must always be ordered in addition:**  
 Laminated safety glass windscreen  
 Four large windows in main passenger area  
 Windows in hinged rear doors  
 Head restraints for driver's and front passenger's seats  
 Automatic seat belts  
 5-speed gearbox  
 Ride-comfort suspension package  
 Steering lock pin  
 Tachograph (to comply with European Community regulations)  
 Max. 65 A or max. 90 A alternator  
 12 V, 300 A (63 Amp/h) battery (only on models with spark-ignition engine)  
 Auxiliary fuel-burning heater  
 Automatic folding step below sliding door  
 Additional roof-mounted turn indicators (for use as school bus)  
 Fire extinguisher, warning triangle, warning light and first-aid box  
 Two reversing lights  
 Various seating arrangements for up to 12 persons  
 Bench seats with or without armrests  
 Cloth or leatherette seat upholstery  
 1 grab handle for each passenger seat, 3 grab rails, ashtrays  
 Roof lining and side panel trim  
 Safety high-grip flooring  
 Spare wheel repositioned outside passenger area

**6-cylinder spark-ignition engines**

Six-cylinder, four-stroke inline engine.

Installed in cab in longitudinal position above front axle, between drivers' and passenger's seats.

Valve gear driven by toothed belt and overhead camshaft with bucket-type tappets.

Crankshaft with 7 main bearings.

Closed, pressurized liquid cooling system, with pump, radiator, header tank and mechanically-driven fan.

Pressurized lubricating oil circuit with oil pump and renewable oil filter element.

Rapid intake air preheating by electrically heated "hedgehog" element, and permanent intake pipe preheating by coolant.

Mixture preparation by Digifant fuel injection system on 69 kW catalytic-converter engine.

**Engine data:**

Displacement: 2.4 litres (2384 cm<sup>3</sup>).

Output:

66 kW at 4500 min<sup>-1</sup> engine speed (90 DIN bhp).

Max. torque:

168 Nm (123.9 lb.ft) at 2400 min<sup>-1</sup> engine speed.

69 kW at 4200 min<sup>-1</sup> engine speed (94 DIN bhp) (with catalytic converter)

Max. torque:

167 Nm (123.1 lb.ft) at 2400 min<sup>-1</sup> engine speed.

Compression ratio: 8.1:1.

**Electrical system:**

12 Volt; 220 A (45 Amp/h) battery.

Max. 45 A alternator.

**Transmission:**

Single dry plate clutch with asbestos-free lining, all-synchronesh four-speed gearbox. Propeller shaft to rear axle differential.

Two-piece propeller shaft on models with 2950 mm and 3650 mm wheelbase.

LT 28/31/35: five-speed gearbox optional at extra charge (standard on LT 40/45/50/55).

**6-cylinder diesel engines**

Six-cylinder, four-stroke inline engine.

Installation: as spark-ignition engine.

Valve gear driven by toothed belt and overhead camshaft with bucket-type tappets.

Crankshaft with 7 main bearings.

Closed, pressurized liquid cooling system, with pump, radiator, header tank and mechanically-driven fan.

Pressurized lubricating oil circuit with oil pump and renewable oil filter element.

Mechanical fuel injection system with distributor-type injection pump and cold-starting aid.

**Engine data:**

Displacement: 2.4 litres (2384 cm<sup>3</sup>).

Power output:

51 kW at 3400 min<sup>-1</sup> engine speed (69 DIN bhp)

Max. torque:

145 Nm (106.9 lb.ft) at 1600–1800 min<sup>-1</sup> engine speed.

55 kW at 4300 min<sup>-1</sup> engine speed (75 DIN bhp) and

57 kW at 4300 min<sup>-1</sup> engine speed (78 DIN bhp).

Max. torque:

144 Nm (106.2 lb.ft) at 2200 min<sup>-1</sup> engine speed.

Compression ratio: 23.0:1.

**Electrical system:**

12 Volt; 395 A (88 Amp/h) battery.

Rapid preheating system. Max. 45 A alternator.

**Transmission:**

Single dry plate clutch with asbestos-free lining, all-synchronesh five-speed gearbox. Propeller shaft to rear axle differential.

Two-piece propeller shaft on models with 2950 mm and 3650 mm wheelbase.

See table for final drive ratios and maximum gradients.

**6-cylinder turbocharged diesel engines**

Six-cylinder, four-stroke inline engine with exhaust-driven turbocharger.

Installation: as spark-ignition engine.

Valve gear driven by toothed belt and overhead camshaft with bucket-type tappets.

Crankshaft with 7 main bearings.

Closed, pressurized liquid cooling system, with pump, radiator, header tank and mechanically-driven fan.

Pressurized lubricating oil circuit with oil pump, renewable oil filter element and additional oil cooler.

Mechanical fuel injection system with distributor-type injection pump and boost-pressure enrichment, cold-starting aid.

**Engine data:**

Displacement: 2.4 litres (2384 cm<sup>3</sup>).

Power output:

68 kW at 3500 min<sup>-1</sup> engine speed (92 DIN bhp).

Max. torque:

195 Nm (143.8 lb.ft) at 1750–3125 min<sup>-1</sup> engine speed.

75 kW at 4300 min<sup>-1</sup> engine speed (102 DIN bhp) and

80 kW at 4300 min<sup>-1</sup> engine speed (109 DIN bhp)

Max. torque:

200 Nm (147.5 lb.ft) at 2500–2600 min<sup>-1</sup> engine speed.

Compression ratio: 23.0:1.

**Electrical system:**

12 Volt; 395 A (88 Amp/h) battery.

Rapid preheating system. Max. 45 A alternator.

**Transmission:**

Single dry plate clutch with asbestos-free lining, all-synchronesh five-speed gearbox. Propeller shaft to rear axle differential.

Two-piece propeller shaft on models with 2950 mm and 3650 mm wheelbase.

See table for final drive ratios and maximum gradients.

**Chassis/suspension/brakes:****LT 28/LT 31/LT 35**

Composite box-section side and cross members, front bumper with impact-absorbing element and hollow deformable sections at front part of chassis frame to dissipate collision energy.

Front suspension: coil springs with telescopic dampers and bump stops.

Rear suspension: longitudinal semi-elliptic leaf springs with telescopic dampers and bump stops.

Front wheel location: independent, with double wishbones; anti-roll bar on LT 28/31 and LT 35 (single tyres).

Rear wheel location: rigid axle.

Steering: worm and roller.

Power steering at extra charge.

Brakes: dual-circuit system with asbestos-free brake pads, front discs, rear drums (self-adjusting), brake servo, load-dependent brake pressure regulator.

Wheels: LT 28/31/35 6 J x 14, single tyres  
LT 35 5 J x 14, twin tyres

Tyres:

LT 28 (all models) 185 R 14 C 8 PR (single tyres)

LT 31 (Delivery van) 195 R 14 C 8 PR (single tyres)

LT 31 (other models) 205 R 14 C 8 PR (single tyres)

LT 35 (Delivery van) 205 R 14 C 8 PR (single tyres)

LT 35 (Low-loader pick-up) 215 R 14 C 8 PR (single tyres)

LT 35 (other models) 185 R 14 C 8 PR (twin tyres)  
or 215 R 14 C 8 PR (single tyres)

**Chassis/suspension/brakes:****LT 40/LT 45/LT 50/LT 55**

Composite box-section side and cross members, front bumper with impact-absorbing element.

Front suspension: two-leaf springs with telescopic dampers and bump stops.

Rear suspension: longitudinal multi-leaf springs with telescopic dampers and bump stops.

Front and rear wheel location: rigid axle located by longitudinal semi-elliptic springs, anti-roll bar at front (also at rear on LT 50/55).

Steering: worm and roller.

Power steering at extra charge.

Brakes: dual-circuit system with asbestos-free brake pads, front discs, self-adjusting rear drums. Brake servo, load-dependent brake pressure regulator.

Tandem brake servo standard on LT 40 upwards with 2950 mm wheelbase, and with 3650 mm wheelbase.

Wheels: LT 40/45/50 5 J x 14 with twin tyres  
LT 55 5½ J x 16 with twin tyres

Tyres:

LT 40 Pick-up with 185 R 14 C 8 PR  
wheelbase 2950 mm (twin tyres)

LT 40 Other models 195 R 14 C 8 PR  
(twin tyres)

LT 45/50 All models 195 R 14 C 8 PR  
(twin tyres)

LT 55 All models 195 R 16 C 8 PR  
(twin tyres)

**Other Data:**

Track, front/rear:

LT 28/31/35 1750/1720 mm (single tyres)

LT 35/40/45/50/55 1750/1500 mm (twin tyres)

Turning circle

2500 mm wheelbase: app. 12.0 m

2950 mm wheelbase: app. 13.0 m

3650 mm wheelbase: app. 15.0 m

Trailer load limits, braked/unbraked:

LT 28/31/35 2000/750 kg

LT 40/45/50/55 2500/750 kg

Fuel tank capacity 70 litres.

# Performance data

| Model / engine / gearbox              |      |              |     |                           | Fuel consumption<br>litres/100 km<br>(Imp. mile/gal)* | Top speed,<br>km/h<br>(mile/h) |
|---------------------------------------|------|--------------|-----|---------------------------|---|--------------------------------|
| <b>Delivery van</b>                   |      |              |     |                           |   |                                |
| LT 28                                 | with | 66 kW engine | and | 4-/5-speed manual gearbox | 14.2/13.2 (19.9/21.4)                                 | 125 (78)                       |
| LT 28                                 | "    | 69 kW "      | "   | 5-speed " "               | 16.1 (17.5)   | 130 (81)                       |
| LT 28 D                               | "    | 51 kW "      | "   | 5-speed " "               | 10.5 (26.9)   | 118 (73)                       |
| LT 28 D                               | "    | 57 kW "      | "   | 5-speed " "               | 11.3 (25.0)   | 120 (75)                       |
| LT 28 TD                              | "    | 68 kW "      | "   | 5-speed " "               | 13.1 (21.6)   | 129 (80)                       |
| LT 28 TD                              | "    | 80 kW "      | "   | 5-speed " "               | 11.7 (24.1)   | 135 (84)                       |
| LT 31                                 | "    | 66 kW "      | "   | 4-/5-speed " "            | 11.9/11.1 (23.7/25.5)                                 | 125 (78)                       |
| LT 31                                 | "    | 69 kW "      | "   | 5-speed " "               | 12.9 (21.9)   | 130 (81)                       |
| LT 31 D                               | "    | 51 kW "      | "   | 5-speed " "               | 9.6 (29.4)  | 118 (73)                       |
| LT 31 D                               | "    | 57 kW "      | "   | 5-speed " "               | 9.6 (29.4)  | 120 (75)                       |
| LT 31 TD                              | "    | 68 kW "      | "   | 5-speed " "               | 10.2 (27.7)   | 128 (80)                       |
| LT 31 TD                              | "    | 80 kW "      | "   | 5-speed " "               | 8.8 (32.1)  | 135 (84)                       |
| LT 35                                 | "    | 66 kW "      | "   | 4-/5-speed " "            | 13.2/12.4 (21.4/22.8)                                 | 124 (77)                       |
| LT 35                                 | "    | 69 kW "      | "   | 5-speed " "               | 12.9 (21.9)   | 129 (80)                       |
| LT 35 D                               | "    | 51 kW "      | "   | 5-speed " "               | 9.2 (30.7)  | 117 (73)                       |
| LT 35 D                               | "    | 57 kW "      | "   | 5-speed " "               | 10.4 (27.2)   | 117 (73)                       |
| LT 35 TD                              | "    | 68 kW "      | "   | 5-speed " "               | 9.6 (29.4)  | 128 (80)                       |
| LT 35 TD                              | "    | 80 kW "      | "   | 5-speed " "               | 9.2 (30.7)  | 133 (83)                       |
| LT 40                                 | "    | 66 kW "      | "   | 5-speed " "               | 14.6 (19.4)   | 120 (75)                       |
| LT 40 D                               | "    | 55 kW "      | "   | 5-speed " "               | 12.0 (23.5)   | 115 (71)                       |
| LT 40 TD                              | "    | 75 kW "      | "   | 5-speed " "               | 11.8 (23.9)   | 122 (76)                       |
| LT 45                                 | "    | 66 kW "      | "   | 5-speed " "               | 14.7 (19.2)   | 120 (75)                       |
| LT 45 D                               | "    | 55 kW "      | "   | 5-speed " "               | 12.3 (23.0)   | 115 (71)                       |
| LT 45 TD                              | "    | 75 kW "      | "   | 5-speed " "               | 12.1 (23.3)   | 122 (76)                       |
| <b>Pick-up and Double-cab pick-up</b> |      |              |     |                           |   |                                |
| LT 28                                 | with | 66 kW engine | and | 4-/5-speed manual gearbox | 16.3/15.9 (17.3/17.8)                                 | 117 (73)                       |
| LT 28                                 | "    | 69 kW "      | "   | 5-speed " "               | 17.4 (16.2)   | 122 (76)                       |
| LT 28 D                               | "    | 51 kW "      | "   | 5-speed " "               | 11.8 (23.9)   | 108 (67)                       |
| LT 28 D                               | "    | 57 kW "      | "   | 5-speed " "               | 12.4 (22.8)   | 110 (68)                       |
| LT 28 TD                              | "    | 68 kW "      | "   | 5-speed " "               | 15.2 (18.6)   | 120 (75)                       |
| LT 28 TD                              | "    | 80 kW "      | "   | 5-speed " "               | 14.2 (19.9)   | 125 (78)                       |
| LT 31                                 | "    | 66 kW "      | "   | 4-/5-speed " "            | 17.9/17.3 (15.8/16.3)                                 | 117 (73)                       |
| LT 31                                 | "    | 69 kW "      | "   | 5-speed " "               | 14.6 (19.3)   | 122 (76)                       |
| LT 31 D                               | "    | 51 kW "      | "   | 5-speed " "               | 10.8 (26.2)   | 108 (67)                       |
| LT 31 D                               | "    | 57 kW "      | "   | 5-speed " "               | 10.5 (26.9)   | 110 (68)                       |
| LT 31 TD                              | "    | 68 kW "      | "   | 5-speed " "               | 12.9 (21.9)   | 120 (75)                       |
| LT 31 TD                              | "    | 80 kW "      | "   | 5-speed " "               | 11.2 (25.2)   | 125 (78)                       |
| LT 35                                 | "    | 66 kW "      | "   | 4-/5-speed " "            | 19.1/18.5 (14.8/15.3)                                 | 116 (72)                       |
| LT 35                                 | "    | 69 kW "      | "   | 5-speed " "               | 14.5 (19.5)   | 121 (75)                       |
| LT 35 D                               | "    | 51 kW "      | "   | 5-speed " "               | 10.4 (27.2)   | 107 (66)                       |
| LT 35 D                               | "    | 57 kW "      | "   | 5-speed " "               | 11.8 (23.9)   | 107 (66)                       |
| LT 35 TD                              | "    | 68 kW "      | "   | 5-speed " "               | 12.6 (22.4)   | 119 (74)                       |
| LT 35 TD                              | "    | 80 kW "      | "   | 5-speed " "               | 12.1 (23.3)   | 122 (76)                       |
| LT 40                                 | "    | 66 kW "      | "   | 5-speed " "               | 16.1 (17.5)   | 112 (70)                       |
| LT 40 D                               | "    | 55 kW "      | "   | 5-speed " "               | 13.3 (21.2)   | 105 (65)                       |
| LT 40 TD                              | "    | 75 kW "      | "   | 5-speed " "               | 13.1 (21.6)   | 115 (71)                       |
| LT 45                                 | "    | 66 kW "      | "   | 5-speed " "               | 16.2 (17.4)   | 112 (70)                       |
| LT 45 D                               | "    | 55 kW "      | "   | 5-speed " "               | 13.6 (20.8)   | 105 (65)                       |
| LT 45 TD                              | "    | 75 kW "      | "   | 5-speed " "               | 13.4 (21.1)   | 115 (71)                       |
| LT 50                                 | "    | 66 kW "      | "   | 5-speed " "               | 16.5 (17.1)   | 112 (70)                       |
| LT 50 D                               | "    | 55 kW "      | "   | 5-speed " "               | 14.1 (20.0)   | 105 (65)                       |
| LT 50 TD                              | "    | 75 kW "      | "   | 5-speed " "               | 13.7 (20.6)   | 115 (71)                       |
| LT 55 D                               | "    | 55 kW "      | "   | 5-speed " "               | 15.1 (18.7)   | 90 (56)                        |
| LT 55 TD                              | "    | 75 kW "      | "   | 5-speed " "               | 14.3 (19.8)   | 115 (71)                       |
| <b>Kombi und Buses**)</b>             |      |              |     |                           |   |                                |
| At constant 90 km/h (56 mile/h)       | with | 66 kW engine | and | 4-/5-speed manual gearbox | 13.1/11.2 (21.6/25.2)                                 | 125 (78)                       |
|                                       | "    | 69 kW "      | "   | 5-speed " "               | 13.3 (21.2)   | 130 (81)                       |
|                                       | "    | 51 kW "      | "   | 5-speed " "               | 9.6 (29.4)  | 118 (73)                       |
|                                       | "    | 57 kW "      | "   | 5-speed " "               | 10.3 (27.4)   | 120 (75)                       |
|                                       | "    | 68 kW "      | "   | 5-speed " "               | 11.1 (25.4)   | 129 (80)                       |
|                                       | "    | 80 kW "      | "   | 5-speed " "               | 8.9 (31.7)  | 135 (84)                       |
| At constant 120 km/h (75 mile/h)      | with | 80 kW engine | and | 5-speed manual gearbox    | 14.5 (19.5)   |                                |
| Urban cycle                           | with | 66 kW engine | and | 4-/5-speed manual gearbox | 16.8/13.9 (16.8/20.3)                                 |                                |
|                                       | "    | 69 kW "      | "   | 5-speed " "               | 19.1 (14.8)   |                                |
|                                       | "    | 51 kW "      | "   | 5-speed " "               | 11.1 (25.4)   |                                |
|                                       | "    | 57 kW "      | "   | 5-speed " "               | 9.2 (30.1)  |                                |
|                                       | "    | 68 kW "      | "   | 5-speed " "               | 13.0 (21.7)   |                                |
|                                       | "    | 80 kW "      | "   | 5-speed " "               | 9.7 (29.1)  |                                |

\* Fuel consumption measured in accordance with DIN standard 70030 (Part 2) at half payload and a constant three-quarters of maximum speed, plus a 10% allowance, although not higher than the legally permitted

|  | Model  | Engine     | Gearbox | Unladen weight <sup>1)</sup><br>with driver<br>kg | Axle load limits<br>front/rear<br>kg | Payload<br>kg | Gross weight<br>limit<br>kg | Overall dimensions |             |              |      |
|--|--|------------|---------|---|--------------------------------------|---------------|-----------------------------|--------------------|-------------|--------------|------|
|  |  |            |         |   |                                      |               |                             | Length<br>mm       | Width<br>mm | Height<br>mm |      |
| <b>Delivery van,<br/>wheelbase<br/>2500 mm</b>               | LT 28  | 66 kW      | 4-speed | 1695  | 1500/1680                            | 1105          | 2800                        | 4855               | 2040        | 2160         |      |
|  | LT 28  | 66 kW      | 5-speed | 1695  | 1500/1680                            | 1105          | 2800                        | 4855               | 2040        | 2160         |      |
|  | LT 28 Cat.                                     | 69 kW      | 4-speed | 1695  | 1500/1680                            | 1105          | 2800                        | 4855               | 2040        | 2160         |      |
|  | LT 28 Cat.                                     | 69 kW      | 5-speed | 1695  | 1500/1680                            | 1105          | 2800                        | 4855               | 2040        | 2160         |      |
|  | LT 28 D  | 51 kW      | 5-speed | 1750  | 1500/1680                            | 1050          | 2800                        | 4855               | 2040        | 2160         |      |
|  | LT 28 D  | 57 kW      | 5-speed | 1750  | 1500/1680                            | 1050          | 2800                        | 4855               | 2040        | 2160         |      |
|  | LT 28 TD                                       | 68 kW      | 5-speed | 1795  | 1500/1680                            | 1035          | 2800                        | 4855               | 2040        | 2160         |      |
|  | LT 28 TD                                       | 80 kW      | 5-speed | 1795  | 1500/1680                            | 1035          | 2800                        | 4855               | 2040        | 2160         |      |
|  | LT 31  | 66 kW      | 4-speed | 1745  | 1500/1860                            | 1455          | 3200                        | 4855               | 2040        | 2160         |      |
|  | LT 31  | 66 kW      | 5-speed | 1745  | 1500/1860                            | 1455          | 3200                        | 4855               | 2040        | 2160         |      |
|  | LT 31 Cat.                                     | 69 kW      | 4-speed | 1745  | 1500/1860                            | 1455          | 3200                        | 4855               | 2040        | 2160         |      |
|  | LT 31 Cat.                                     | 69 kW      | 5-speed | 1745  | 1500/1860                            | 1455          | 3200                        | 4855               | 2040        | 2160         |      |
|  | LT 31 D  | 51 kW      | 5-speed | 1800  | 1500/1860                            | 1400          | 3200                        | 4855               | 2040        | 2160         |      |
|  | LT 31 D  | 57 kW      | 5-speed | 1800  | 1500/1860                            | 1400          | 3200                        | 4855               | 2040        | 2160         |      |
|  | LT 31 TD                                       | 68 kW      | 5-speed | 1815  | 1500/1860                            | 1385          | 3200                        | 4855               | 2040        | 2160         |      |
|  | LT 31 TD                                       | 80 kW      | 5-speed | 1815  | 1500/1860                            | 1385          | 3200                        | 4855               | 2040        | 2160         |      |
|  | LT 35  | 66 kW      | 4-speed | 1765  | 1500/2060                            | 1735          | 3500                        | 4855               | 2040        | 2160         |      |
|  | LT 35  | 66 kW      | 5-speed | 1765  | 1500/2060                            | 1735          | 3500                        | 4855               | 2040        | 2160         |      |
|  | LT 35 Cat.                                     | 69 kW      | 4-speed | 1765  | 1500/2060                            | 1735          | 3500                        | 4855               | 2040        | 2160         |      |
|  | LT 35 Cat.                                     | 69 kW      | 5-speed | 1765  | 1500/2060                            | 1735          | 3500                        | 4855               | 2040        | 2160         |      |
|  | LT 35 D  | 51 kW      | 5-speed | 1820  | 1500/2060                            | 1680          | 3500                        | 4855               | 2040        | 2160         |      |
|  | LT 35 D  | 57 kW      | 5-speed | 1820  | 1500/2060                            | 1680          | 3500                        | 4855               | 2040        | 2160         |      |
|  | LT 35 TD                                       | 68 kW      | 5-speed | 1835  | 1500/2060                            | 1665          | 3500                        | 4855               | 2040        | 2160         |      |
|  | LT 35 TD                                       | 80 kW      | 5-speed | 1835  | 1500/2060                            | 1665          | 3500                        | 4855               | 2040        | 2160         |      |
|  | <b>Delivery van,<br/>wheelbase<br/>2950 mm</b> | LT 28      | 66 kW   | 4-speed   | 1775                                 | 1500/1680     | 1025                        | 2800               | 5305        | 2040         | 2160 |
|  |  | LT 28      | 66 kW   | 5-speed   | 1775                                 | 1500/1680     | 1025                        | 2800               | 5305        | 2040         | 2160 |
|  |  | LT 28 Cat. | 69 kW   | 4-speed   | 1775                                 | 1500/1680     | 1025                        | 2800               | 5305        | 2040         | 2160 |
| LT 28 Cat.   |  | 69 kW      | 5-speed | 1775  | 1500/1680                            | 1025          | 2800                        | 5305               | 2040        | 2160         |      |
| LT 28 D  |  | 51 kW      | 5-speed | 1830  | 1500/1680                            | 970           | 2800                        | 5305               | 2040        | 2160         |      |
| LT 28 D  |  | 57 kW      | 5-speed | 1830  | 1500/1680                            | 970           | 2800                        | 5305               | 2040        | 2160         |      |
| LT 28 TD   |  | 68 kW      | 5-speed | 1845  | 1500/1680                            | 955           | 2800                        | 5305               | 2040        | 2160         |      |
| LT 28 TD   |  | 80 kW      | 5-speed | 1845  | 1500/1680                            | 955           | 2800                        | 5305               | 2040        | 2160         |      |
| LT 31  |  | 66 kW      | 4-speed | 1825  | 1500/1860                            | 1375          | 3200                        | 5305               | 2040        | 2160         |      |
| LT 31  |  | 66 kW      | 5-speed | 1825  | 1500/1860                            | 1375          | 3200                        | 5305               | 2040        | 2160         |      |
| LT 31 Cat.   |  | 69 kW      | 4-speed | 1825  | 1500/1860                            | 1375          | 3200                        | 5305               | 2040        | 2160         |      |
| LT 31 Cat.   |  | 69 kW      | 5-speed | 1825  | 1500/1860                            | 1375          | 3200                        | 5305               | 2040        | 2160         |      |
| LT 31 D  |  | 51 kW      | 5-speed | 1880  | 1500/1860                            | 1320          | 3200                        | 5305               | 2040        | 2160         |      |
| LT 31 D  |  | 57 kW      | 5-speed | 1880  | 1500/1860                            | 1320          | 3200                        | 5305               | 2040        | 2160         |      |
| LT 31 TD   |  | 68 kW      | 5-speed | 1895  | 1500/1860                            | 1305          | 3200                        | 5305               | 2040        | 2160         |      |
| LT 31 TD   |  | 80 kW      | 5-speed | 1895  | 1500/1860                            | 1305          | 3200                        | 5305               | 2040        | 2160         |      |
| LT 35  |  | 66 kW      | 4-speed | 1845  | 1500/2060                            | 1655          | 3500                        | 5305               | 2040        | 2160         |      |
| LT 35  |  | 66 kW      | 5-speed | 1845  | 1500/2060                            | 1655          | 3500                        | 5305               | 2040        | 2160         |      |
| LT 35 Cat.   |  | 69 kW      | 4-speed | 1845  | 1500/2060                            | 1655          | 3500                        | 5305               | 2040        | 2160         |      |
| LT 35 Cat.   |  | 69 kW      | 5-speed | 1845  | 1500/2060                            | 1655          | 3500                        | 5305               | 2040        | 2160         |      |
| LT 35 D  |  | 51 kW      | 5-speed | 1900  | 1500/2060                            | 1600          | 3500                        | 5305               | 2040        | 2160         |      |
| LT 35 D  |  | 57 kW      | 5-speed | 1900  | 1500/2060                            | 1600          | 3500                        | 5305               | 2040        | 2160         |      |
| LT 35 TD   |  | 68 kW      | 5-speed | 1915  | 1500/2060                            | 1585          | 3500                        | 5305               | 2040        | 2160         |      |
| LT 35 TD   |  | 80 kW      | 5-speed | 1915  | 1500/2060                            | 1585          | 3500                        | 5305               | 2040        | 2160         |      |
| LT 40  |  | 66 kW      | 5-speed | 2025  | 1900/2800                            | 1975          | 4000                        | 5305               | 2050        | 2250         |      |
| LT 40 D  |  | 55 kW      | 5-speed | 2080  | 1900/2800                            | 1920          | 4000                        | 5305               | 2050        | 2250         |      |
| LT 40 TD   |  | 75 kW      | 5-speed | 2095  | 1900/2800                            | 1905          | 4000                        | 5305               | 2050        | 2250         |      |
| LT 45  | 66 kW  | 5-speed    | 2025    | 1900/3100   | 2575                                 | 4600          | 5305                        | 2050               | 2250        |              |      |
| LT 45 D  | 55 kW  | 5-speed    | 2080    | 1900/3100   | 2520                                 | 4600          | 5305                        | 2050               | 2250        |              |      |
| LT 45 TD   | 75 kW  | 5-speed    | 2095    | 1900/3100   | 2505                                 | 4600          | 5305                        | 2050               | 2250        |              |      |
| <b>High-roof<br/>delivery van,<br/>wheelbase<br/>2500 mm</b> | LT 28  | 66 kW      | 4-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 4855               | 2040        | 2570         |      |
|  | LT 28  | 66 kW      | 5-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 4855               | 2040        | 2570         |      |
|  | LT 28 Cat.                                     | 69 kW      | 4-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 4855               | 2040        | 2570         |      |
|  | LT 28 Cat.                                     | 69 kW      | 5-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 4855               | 2040        | 2570         |      |
|  | LT 28 D  | 51 kW      | 5-speed | 1800  | 1500/1680                            | 1000          | 2800                        | 4855               | 2040        | 2570         |      |
|  | LT 28 D  | 57 kW      | 5-speed | 1800  | 1500/1680                            | 1000          | 2800                        | 4855               | 2040        | 2570         |      |
|  | LT 28 TD                                       | 68 kW      | 5-speed | 1815  | 1500/1680                            | 985           | 2800                        | 4855               | 2040        | 2570         |      |
|  | LT 28 TD                                       | 80 kW      | 5-speed | 1815  | 1500/1680                            | 985           | 2800                        | 4855               | 2040        | 2570         |      |
|  | LT 31  | 66 kW      | 4-speed | 1795  | 1500/1860                            | 1405          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 31  | 66 kW      | 5-speed | 1795  | 1500/1860                            | 1405          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 31 Cat.                                     | 69 kW      | 4-speed | 1795  | 1500/1860                            | 1405          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 31 Cat.                                     | 69 kW      | 5-speed | 1795  | 1500/1860                            | 1405          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 31 D  | 51 kW      | 5-speed | 1850  | 1500/1860                            | 1350          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 31 D  | 57 kW      | 5-speed | 1850  | 1500/1860                            | 1350          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 31 TD                                       | 68 kW      | 5-speed | 1865  | 1500/1860                            | 1335          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 31 TD                                       | 80 kW      | 5-speed | 1865  | 1500/1860                            | 1335          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 35  | 66 kW      | 4-speed | 1815  | 1500/2060                            | 1685          | 3500                        | 4855               | 2040        | 2570         |      |
|  | LT 35  | 66 kW      | 5-speed | 1815  | 1500/2060                            | 1685          | 3500                        | 4855               | 2040        | 2570         |      |
|  | LT 35 Cat.                                     | 69 kW      | 4-speed | 1815  | 1500/2060                            | 1685          | 3500                        | 4855               | 2040        | 2570         |      |
|  | LT 35 Cat.                                     | 69 kW      | 5-speed | 1815  | 1500/2060                            | 1685          | 3500                        | 4855               | 2040        | 2570         |      |
|  | LT 35 D  | 51 kW      | 5-speed | 1870  | 1500/2060                            | 1630          | 3500                        | 4855               | 2040        | 2570         |      |
|  | LT 35 D  | 57 kW      | 5-speed | 1870  | 1500/2060                            | 1630          | 3500                        | 4855               | 2040        | 2570         |      |
|  | LT 35 TD                                       | 68 kW      | 5-speed | 1885  | 1500/2060                            | 1615          | 3200                        | 4855               | 2040        | 2570         |      |
|  | LT 35 TD                                       | 80 kW      | 5-speed | 1885  | 1500/2060                            | 1615          | 3200                        | 4855               | 2040        | 2570         |      |

<sup>1)</sup> Extra equipment may increase the vehicle's unladen weight, in which case the payload limit must be reduced accordingly.

\* Unladen weight without driver

<sup>2)</sup> Calculated max. gradients at full payload on a good road

All heights stated may vary by up to app. ± 30 mm depending on specification.

# Max. gradients

| Load space/area dimensions |             |              | Load space/<br>area<br>m <sup>2</sup> /m <sup>2</sup> | Final drive ratios |      |      |       |      |       |       | Max.<br>gradients<br>% |
|----------------------------|-------------|--------------|---|--------------------|------|------|-------|------|-------|-------|------------------------|
| Length<br>mm               | Width<br>mm | Height<br>mm |   | 39:8               | 40:9 | 41:7 | 41:10 | 43:8 | 53:13 | 53:14 |                        |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 40/37/34               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 46/42/39               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 43/39                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 51/41                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 41/37/33               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 42/38/35               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | —     | —    | 4.08  | —     | 47                     |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 49/46                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 34/31/29               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 39/36/33               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 34/31                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | —     | —    | —     | —     | 40/37                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 34/31/28               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 36/33/30               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | —     | —    | 4.08  | —     | 39                     |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 42/39                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 32/29/27               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 40/36/33               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 31/28                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | —     | —    | —     | —     | 36/33                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | —     | —    | —     | —     | 30/27                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 32/30/28               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | —     | —    | 4.08  | —     | 34                     |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 37/34                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 40/37/34               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 46/42/39               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 43/39                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 51/41                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 41/37/33               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 42/38/35               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | —     | —    | 4.08  | —     | 47                     |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 49/46                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 34/31/29               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 39/36/33               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 34/31                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | —     | —    | —     | —     | 40/37                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 34/31/28               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 36/33/30               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | —     | —    | 4.08  | —     | 39                     |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 42/39                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 31/28/26               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 35/32/30               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 31/28                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | —     | —    | —     | —     | 36/33                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | —     | —    | —     | —     | 30/27                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | —     | 5.38 | —     | —     | 32/29/35               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | —     | —    | 4.08  | —     | 34                     |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 37/34                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | —    | —    | —     | 5.38 | —     | —     | 34/37                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | —    | 5.86 | —     | 5.38 | —     | —     | 28/34/31               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | —     | 5.38 | —     | —     | 40/37/44               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | —    | —    | —     | 5.38 | —     | —     | 29/32                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | —    | 5.86 | —     | 5.38 | —     | —     | 24/30/27               |
| 3410                       | 1815        | 1460         | 9.04/6.19   | 4.88               | 4.44 | —    | —     | 5.38 | —     | —     | 35/32/38               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 40/37/34               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 46/42/39               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 43/39                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 51/41                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 41/37/33               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 42/38/35               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | —     | —    | 4.08  | —     | 47                     |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 49/46                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 34/31/29               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 39/36/33               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 34/31                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | —     | —    | —     | —     | 40/37                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 34/31/28               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 36/33/30               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | —     | —    | 4.08  | —     | 39                     |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 42/39                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 32/29/27               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 40/36/32               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 31/28                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | —     | —    | —     | —     | 36/33                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | —     | —    | —     | —     | 30/27                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 32/30/28               |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | —     | —    | 4.08  | —     | 34                     |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 37/34                  |

|  | Model                                   | Engine | Gearbox | Unladen weight <sup>1)</sup><br>with driver<br>kg | Axle load limits<br>front/rear<br>kg | Payload<br>kg                      | Gross weight<br>limit<br>kg | Overall dimensions |             |              |
|--|---|--------|---------|---|--------------------------------------|------------------------------------|-----------------------------|--------------------|-------------|--------------|
|  |   |        |         |   |                                      |                                    |                             | Length<br>mm       | Width<br>mm | Height<br>mm |
| <b>High-roof<br/>delivery van,<br/>wheelbase<br/>2950 mm</b> | LT 28                                   | 66 kW  | 4-speed | 1825  | 1500/1680                            | 975                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28                                   | 66 kW  | 5-speed | 1825  | 1500/1680                            | 975                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 Cat.                              | 69 kW  | 4-speed | 1825  | 1500/1680                            | 975                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 Cat.                              | 69 kW  | 5-speed | 1825  | 1500/1680                            | 975                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 D                                 | 51 kW  | 5-speed | 1880  | 1500/1680                            | 920                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 D                                 | 57 kW  | 5-speed | 1880  | 1500/1680                            | 920                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 TD                                | 68 kW  | 5-speed | 1815  | 1500/1680                            | 985                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 TD                                | 80 kW  | 5-speed | 1815  | 1500/1680                            | 985                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 31                                   | 66 kW  | 4-speed | 1875  | 1500/1860                            | 1325                               | 3200                        | 5305               | 2040        | 2570         |
|  | LT 31                                   | 66 kW  | 5-speed | 1875  | 1500/1860                            | 1325                               | 3200                        | 5305               | 2040        | 2570         |
|  | LT 31 Cat.                              | 69 kW  | 4-speed | 1875  | 1500/1860                            | 1325                               | 3200                        | 5305               | 2040        | 2570         |
|  | LT 31 Cat.                              | 69 kW  | 5-speed | 1875  | 1500/1860                            | 1325                               | 3200                        | 5305               | 2040        | 2570         |
|  | LT 31 D                                 | 51 kW  | 5-speed | 1930  | 1500/1860                            | 1270                               | 3200                        | 5305               | 2040        | 2570         |
|  | LT 31 D                                 | 57 kW  | 5-speed | 1930  | 1500/1860                            | 1270                               | 3200                        | 5305               | 2040        | 2570         |
|  | LT 31 TD                                | 68 kW  | 5-speed | 1865  | 1500/1860                            | 1335                               | 3200                        | 5305               | 2040        | 2570         |
|  | LT 31 TD                                | 80 kW  | 5-speed | 1865  | 1500/1860                            | 1335                               | 3200                        | 5305               | 2040        | 2570         |
|  | LT 35                                   | 66 kW  | 4-speed | 1895  | 1500/2060                            | 1605                               | 3500                        | 5305               | 2040        | 2570         |
|  | LT 35                                   | 66 kW  | 5-speed | 1895  | 1500/2060                            | 1605                               | 3500                        | 5305               | 2040        | 2570         |
|  | LT 35 Cat.                              | 69 kW  | 4-speed | 1895  | 1500/2060                            | 1605                               | 3500                        | 5305               | 2040        | 2570         |
|  | LT 35 Cat.                              | 69 kW  | 5-speed | 1895  | 1500/2060                            | 1605                               | 3500                        | 5305               | 2040        | 2570         |
|  | LT 35 D                                 | 51 kW  | 5-speed | 1950  | 1500/2060                            | 1550                               | 3500                        | 5305               | 2040        | 2570         |
|  | LT 35 D                                 | 57 kW  | 5-speed | 1950  | 1500/2060                            | 1550                               | 3500                        | 5305               | 2040        | 2570         |
|  | LT 35 TD                                | 68 kW  | 5-speed | 1965  | 1500/2060                            | 1535                               | 3500                        | 5305               | 2040        | 2570         |
|  | LT 35 TD                                | 80 kW  | 5-speed | 1965  | 1500/2060                            | 1535                               | 3500                        | 5305               | 2040        | 2570         |
|  | LT 40                                   | 66 kW  | 5-speed | 2075  | 1900/2800                            | 1925                               | 4000                        | 5305               | 2050        | 2660         |
|  | LT 40 D                                 | 55 kW  | 5-speed | 2130  | 1900/2800                            | 1870                               | 4000                        | 5305               | 2050        | 2660         |
|  | LT 40 TD                                | 75 kW  | 5-speed | 2145  | 1900/2800                            | 1885                               | 4000                        | 5305               | 2050        | 2660         |
|  | LT 45                                   | 66 kW  | 5-speed | 2075  | 1900/3100                            | 2525                               | 4600                        | 5305               | 2050        | 2660         |
|  | LT 45 D                                 | 55 kW  | 5-speed | 2130  | 1900/3100                            | 2470                               | 4600                        | 5305               | 2050        | 2660         |
|  | LT 45 TD                                | 75 kW  | 5-speed | 2145  | 1900/3100                            | 2455                               | 4600                        | 5305               | 2050        | 2660         |
|  | <b>Kombi,<br/>wheelbase<br/>2500 mm</b> | LT 28  | 66 kW   | 4-speed   | 1725*                                | 1600/1680                          | 1075                        | 2800               | 4855        | 2040         |
| LT 28  |   | 66 kW  | 5-speed | 1725*   | 1600/1680                            | 1075                               | 2800                        | 4855               | 2040        | 2160         |
| LT 28 Cat.   |   | 69 kW  | 4-speed | 1725*   | 1600/1680                            | 1075                               | 2800                        | 4855               | 2040        | 2160         |
| LT 28 Cat.   |   | 69 kW  | 5-speed | 1725*   | 1600/1680                            | 1075                               | 2800                        | 4855               | 2040        | 2160         |
| LT 28 D  |   | 51 kW  | 5-speed | 1780*   | 1600/1680                            | 1020                               | 2800                        | 4855               | 2040        | 2160         |
| LT 28 D  |   | 57 kW  | 5-speed | 1780*   | 1600/1680                            | 1020                               | 2800                        | 4855               | 2040        | 2160         |
| LT 28 TD   |   | 68 kW  | 5-speed | 1795*   | 1500/1680                            | 1005                               | 2800                        | 4855               | 2040        | 2160         |
| LT 28 TD   |   | 80 kW  | 5-speed | 1795*   | 1500/1680                            | 1005                               | 2800                        | 4855               | 2040        | 2160         |
| <b>Kombi,<br/>wheelbase<br/>2950 mm</b>                      | LT 28                                   | 66 kW  | 4-speed | 1805*   | 1600/1680                            | 995                                | 2800                        | 5305               | 2040        | 2160         |
|  | LT 28                                   | 66 kW  | 5-speed | 1805*   | 1600/1680                            | 995                                | 2800                        | 5305               | 2040        | 2160         |
|  | LT 28 Cat.                              | 69 kW  | 4-speed | 1805*   | 1600/1680                            | 995                                | 2800                        | 5305               | 2040        | 2160         |
|  | LT 28 Cat.                              | 69 kW  | 5-speed | 1805*   | 1600/1680                            | 995                                | 2800                        | 5305               | 2040        | 2160         |
|  | LT 28 D                                 | 51 kW  | 5-speed | 1860*   | 1600/1680                            | 940                                | 2800                        | 5305               | 2040        | 2160         |
|  | LT 28 D                                 | 57 kW  | 5-speed | 1860*   | 1600/1680                            | 940                                | 2800                        | 5305               | 2040        | 2160         |
|  | LT 28 TD                                | 68 kW  | 5-speed | 1875*   | 1500/1680                            | 925                                | 2800                        | 5305               | 2040        | 2160         |
|  | LT 28 TD                                | 80 kW  | 5-speed | 1875*   | 1500/1680                            | 925                                | 2800                        | 5305               | 2040        | 2160         |
| <b>High-roof Kombi,<br/>wheelbase<br/>2500 mm</b>            | LT 28                                   | 66 kW  | 4-speed | 1775*   | 1600/1680                            | 1025                               | 2800                        | 4855               | 2040        | 2570         |
|  | LT 28                                   | 66 kW  | 5-speed | 1775*   | 1600/1680                            | 1025                               | 2800                        | 4855               | 2040        | 2570         |
|  | LT 28 Cat.                              | 69 kW  | 4-speed | 1775*   | 1600/1680                            | 1025                               | 2800                        | 4855               | 2040        | 2570         |
|  | LT 28 Cat.                              | 69 kW  | 5-speed | 1775*   | 1600/1680                            | 1025                               | 2800                        | 4855               | 2040        | 2570         |
|  | LT 28 D                                 | 51 kW  | 5-speed | 1830*   | 1600/1680                            | 970                                | 2800                        | 4855               | 2040        | 2570         |
|  | LT 28 D                                 | 57 kW  | 5-speed | 1830*   | 1600/1680                            | 970                                | 2800                        | 4855               | 2040        | 2570         |
|  | LT 28 TD                                | 68 kW  | 5-speed | 1845*   | 1500/1680                            | 955                                | 2800                        | 4855               | 2040        | 2570         |
|  | LT 28 TD                                | 80 kW  | 5-speed | 1845*   | 1500/1680                            | 955                                | 2800                        | 4855               | 2040        | 2570         |
| <b>High-roof Kombi,<br/>wheelbase<br/>2950 mm</b>            | LT 28                                   | 66 kW  | 4-speed | 1855*   | 1600/1680                            | 945                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28                                   | 66 kW  | 5-speed | 1855*   | 1600/1680                            | 945                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 Cat.                              | 69 kW  | 4-speed | 1855*   | 1600/1680                            | 945                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 Cat.                              | 69 kW  | 5-speed | 1855*   | 1600/1680                            | 945                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 D                                 | 51 kW  | 5-speed | 1910*   | 1600/1680                            | 890                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 D                                 | 57 kW  | 5-speed | 1910*   | 1600/1680                            | 890                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 TD                                | 68 kW  | 5-speed | 1925*   | 1500/1680                            | 875                                | 2800                        | 5305               | 2040        | 2570         |
|  | LT 28 TD                                | 80 kW  | 5-speed | 1925*   | 1500/1680                            | 875                                | 2800                        | 5305               | 2040        | 2570         |
| <b>Braunschweig Bus,<br/>wheelbase<br/>2500 mm</b>           | LT 31                                   | 66 kW  | 5-speed | Depending on<br>specification                     | 1500/1860                            | Space for<br>max. 15<br>passengers | 3100                        | 4855               | 2040        | 2160         |
|  | LT 31 Cat.                              | 69 kW  | 5-speed | Depending on<br>specification                     | 1500/1860                            | Space for<br>max. 15<br>passengers | 3100                        | 4855               | 2040        | 2160         |
|  | LT 31 D                                 | 51 kW  | 5-speed | Depending on<br>specification                     | 1500/1860                            | Space for<br>max. 15<br>passengers | 3100                        | 4855               | 2040        | 2160         |
|  | LT 31 D                                 | 57 kW  | 5-speed | Depending on<br>specification                     | 1500/1860                            | Space for<br>max. 15<br>passengers | 3100                        | 4855               | 2040        | 2160         |
|  | LT 31 TD                                | 68 kW  | 5-speed | Depending on<br>specification                     | 1500/1860                            | Space for<br>max. 15<br>passengers | 3100                        | 4855               | 2040        | 2160         |
|  | LT 31 TD                                | 80 kW  | 5-speed | Depending on<br>specification                     | 1500/1860                            | Space for<br>max. 15<br>passengers | 3100                        | 4855               | 2040        | 2160         |
| <b>Wolfsburg Bus,<br/>wheelbase<br/>2950 mm</b>              | LT 31                                   | 66 kW  | 5-speed | Depending<br>specification                        | 1600/1860                            | Space for<br>max. 15<br>passengers | 3360                        | 5305               | 2040        | 2570         |
|  | LT 31 Cat.                              | 69 kW  | 5-speed | Depending<br>specification                        | 1600/1860                            | Space for<br>max. 15<br>passengers | 3360                        | 5305               | 2040        | 2570         |
|  | LT 31 D                                 | 51 kW  | 5-speed | Depending<br>specification                        | 1600/1860                            | Space for<br>max. 15<br>passengers | 3360                        | 5305               | 2040        | 2570         |
|  | LT 31 D                                 | 57 kW  | 5-speed | Depending<br>specification                        | 1600/1860                            | Space for<br>max. 15<br>passengers | 3360                        | 5305               | 2040        | 2570         |
|  | LT 31 TD                                | 68 kW  | 5-speed | Depending<br>specification                        | 1500/1860                            | Space for<br>max. 15<br>passengers | 3360                        | 5305               | 2040        | 2570         |
|  | LT 31 TD                                | 80 kW  | 5-speed | Depending<br>specification                        | 1500/1860                            | Space for<br>max. 15<br>passengers | 3360                        | 5305               | 2040        | 2570         |

<sup>1)</sup> Extra equipment may increase the vehicle's unladen weight, in which case the payload limit must be reduced accordingly.

\* Unladen weight without driver

<sup>2)</sup> Calculated max. gradients at full payload on a good road

All heights stated may vary by up to app. ± 30 mm depending on specification.



# Max. gradients

| Load space/area dimensions |             |              | Load space/<br>area<br>m <sup>2</sup> /m <sup>2</sup> | Final drive ratios |      |      |       |      |       |       | Max.<br>gradients<br>% |
|----------------------------|-------------|--------------|---|--------------------|------|------|-------|------|-------|-------|------------------------|
| Length<br>mm               | Width<br>mm | Height<br>mm |   | 39:8               | 40:9 | 41:7 | 41:10 | 43:8 | 53:13 | 53:14 |                        |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 40/37/34               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 46/42/39               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 43/39                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 51/41                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 41/37/33               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 42/38/35               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | —     | —    | 4.08  | —     | 47                     |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 49/46                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 34/31/29               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 39/36/33               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 34/31                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | —     | —    | —     | —     | 40/37                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 34/31/28               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 36/33/30               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | —     | —    | 4.08  | —     | 39                     |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 42/39                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 31/28/26               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 35/32/30               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 31/28                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | —     | —    | —     | —     | 36/33                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | —     | —    | —     | —     | 30/27                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | —     | 5.38 | —     | —     | 32/29/35               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | —     | —    | 4.08  | —     | 34                     |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 37/34                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | —    | —    | —     | 5.38 | —     | —     | 34/37                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | —    | 5.86 | —     | 5.38 | —     | —     | 28/34/31               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | —     | 5.38 | —     | —     | 40/37/44               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | —    | —    | —     | 5.38 | —     | —     | 29/32                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | —    | 5.86 | —     | 5.38 | —     | —     | 24/30/27               |
| 3410                       | 1815        | 1870         | 11.57/6.19  | 4.88               | 4.44 | —    | —     | 5.38 | —     | —     | 35/32/38               |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | —     | —    | —     | —     | 36                     |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | 4.10  | —    | —     | 3.79  | 41/38                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | —     | —    | —     | —     | 43                     |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 51/41                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 37/33                  |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | 4.10  | —    | —     | —     | 34                     |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | —     | —    | 4.08  | —     | 47                     |
| 2970                       | 1815        | 1460         | 7.87/5.39   | —                  | —    | —    | —     | —    | —     | 3.79  | 46                     |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | —     | —    | —     | —     | 36                     |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | 4.10  | —    | —     | 3.79  | 41/38                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | —     | —    | —     | —     | 43                     |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 51/41                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 37/33                  |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | 4.10  | —    | —     | —     | 34                     |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | —     | —    | 4.08  | —     | 47                     |
| 3410                       | 1815        | 1460         | 9.04/6.19   | —                  | —    | —    | —     | —    | —     | 3.79  | 46                     |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | —     | —    | —     | —     | 36                     |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | 4.10  | —    | —     | 3.79  | 41/38                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | —     | —    | —     | —     | 43                     |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 51/41                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 37/33                  |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | 4.10  | —    | —     | —     | 34                     |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | —     | —    | 4.08  | —     | 47                     |
| 2970                       | 1815        | 1870         | 10.08/5.39  | —                  | —    | —    | —     | —    | —     | 3.79  | 46                     |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | —     | —    | —     | —     | 36                     |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | 4.10  | —    | —     | 3.79  | 41/38                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | —     | —    | —     | —     | 43                     |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 51/41                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 37/33                  |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | 4.10  | —    | —     | —     | 34                     |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | —     | —    | 4.08  | —     | 47                     |
| 3410                       | 1815        | 1870         | 11.57/6.19  | —                  | —    | —    | —     | —    | —     | 3.79  | 46                     |
| 2970                       | 1815        | 1460         | —   | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 39/36/33               |
| 2970                       | 1815        | 1460         | —   | 4.88               | 4.44 | —    | —     | —    | —     | —     | 41/38                  |
| 2970                       | 1815        | 1460         | —   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 35/32/29               |
| 2970                       | 1815        | 1460         | —   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 36/33/30               |
| 2970                       | 1815        | 1460         | —   | —                  | —    | —    | —     | —    | 4.08  | —     | 40                     |
| 2970                       | 1815        | 1460         | —   | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 42/39                  |
| 3410                       | 1815        | 1870         | —   | —                  | 4.44 | —    | 4.10  | —    | —     | 3.79  | 39/36/33               |
| 3410                       | 1815        | 1870         | —   | 4.88               | 4.44 | —    | —     | —    | —     | —     | 38/35                  |
| 3410                       | 1815        | 1870         | —   | —                  | 4.44 | —    | 4.10  | —    | —     | —     | 32/30/27               |
| 3410                       | 1815        | 1870         | —   | 4.88               | 4.44 | —    | 4.10  | —    | —     | —     | 36/33/30               |
| 3410                       | 1815        | 1870         | —   | —                  | —    | —    | —     | —    | 4.08  | —     | 37                     |
| 3410                       | 1815        | 1870         | —   | —                  | —    | —    | —     | —    | 4.08  | 3.79  | 42/39                  |

|                                  | Model                    | Engine  | Gearbox | Unladen weight <sup>1)</sup><br>with driver<br>kg | Axle load limits<br>front/rear<br>kg | Payload<br>kg | Gross weight<br>limit<br>kg | Overall dimensions |             |              |
|----------------------------------|--------------------------|---------|---------|---|--------------------------------------|---------------|-----------------------------|--------------------|-------------|--------------|
|                                  |                          |         |         |   |                                      |               |                             | Length<br>mm       | Width<br>mm | Height<br>mm |
| Pick-up,<br>wheelbase<br>2500 mm | LT 28                    | 66 kW   | 4-speed | 1690  | 1500/1680                            | 1110          | 2800                        | 4875               | 2140        | 2105         |
|                                  | LT 28                    | 66 kW   | 5-speed | 1690  | 1500/1680                            | 1110          | 2800                        | 4875               | 2140        | 2105         |
|                                  | LT 28 Cat.               | 69 kW   | 4-speed | 1690  | 1500/1680                            | 1110          | 2800                        | 4875               | 2140        | 2105         |
|                                  | LT 28 Cat.               | 69 kW   | 5-speed | 1690  | 1500/1680                            | 1110          | 2800                        | 4875               | 2140        | 2105         |
|                                  | LT 28 D                  | 51 kW   | 5-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 4875               | 2140        | 2105         |
|                                  | LT 28 D                  | 57 kW   | 5-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 4875               | 2140        | 2105         |
|                                  | LT 28 TD                 | 68 kW   | 5-speed | 1760*   | 1500/1680                            | 1040          | 2800                        | 4875               | 2140        | 2105         |
|                                  | LT 28 TD                 | 80 kW   | 5-speed | 1760*   | 1500/1680                            | 1040          | 2800                        | 4875               | 2140        | 2105         |
|                                  | LT 31                    | 66 kW   | 4-speed | 1720  | 1500/1940                            | 1480          | 3200                        | 4875               | 2140        | 2105         |
|                                  | LT 31                    | 66 kW   | 5-speed | 1720  | 1500/1940                            | 1480          | 3200                        | 4875               | 2140        | 2105         |
|                                  | LT 31 Cat.               | 69 kW   | 4-speed | 1720  | 1500/1940                            | 1480          | 3200                        | 4875               | 2140        | 2105         |
|                                  | LT 31 Cat.               | 69 kW   | 5-speed | 1720  | 1500/1940                            | 1480          | 3200                        | 4875               | 2140        | 2105         |
|                                  | LT 31 D                  | 51 kW   | 5-speed | 1775  | 1500/1940                            | 1425          | 3200                        | 4875               | 2140        | 2105         |
|                                  | LT 31 D                  | 57 kW   | 5-speed | 1775  | 1500/1940                            | 1425          | 3200                        | 4875               | 2140        | 2105         |
|                                  | LT 31 TD                 | 68 kW   | 5-speed | 1810  | 1500/1940                            | 1390          | 3200                        | 4875               | 2140        | 2105         |
|                                  | LT 31 TD                 | 80 kW   | 5-speed | 1810  | 1500/1940                            | 1390          | 3200                        | 4875               | 2140        | 2105         |
|                                  | LT 35 <sup>7)</sup>      | 66 kW   | 4-speed | 1795  | 1500/2300                            | 1705          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 <sup>5)</sup>      | 66 kW   | 4-speed | 1795  | 1500/2300                            | 1705          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 <sup>7)</sup>      | 66 kW   | 5-speed | 1795  | 1500/2300                            | 1705          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 <sup>5)</sup>      | 66 kW   | 5-speed | 1795  | 1500/2300                            | 1705          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 <sup>7)</sup> Cat. | 69 kW   | 4-speed | 1795  | 1500/2300                            | 1705          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 <sup>5)</sup> Cat. | 69 kW   | 4-speed | 1795  | 1500/2300                            | 1705          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 <sup>7)</sup> Cat. | 69 kW   | 5-speed | 1795  | 1500/2300                            | 1705          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 <sup>5)</sup> Cat. | 69 kW   | 5-speed | 1795  | 1500/2300                            | 1705          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 D <sup>7)</sup>    | 51 kW   | 5-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 4875               | 2140        | 2110         |
|                                  | LT 35 D <sup>5)</sup>    | 51 kW   | 5-speed | 1815  | 1500/2240                            | 1685          | 3500                        | 4875               | 2140        | 2105         |
|                                  | LT 35 D <sup>7)</sup>    | 57 kW   | 5-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 4875               | 2140        | 2105         |
|                                  | LT 35 D <sup>5)</sup>    | 57 kW   | 5-speed | 1815  | 1500/2240                            | 1685          | 3500                        | 4875               | 2140        | 2105         |
|                                  | LT 35 TD <sup>7)</sup>   | 68 kW   | 5-speed | 1865  | 1500/2300                            | 1635          | 3500                        | 4875               | 2140        | 2105         |
|                                  | LT 35 TD <sup>5)</sup>   | 68 kW   | 5-speed | 1830  | 1500/2240                            | 1670          | 3500                        | 4875               | 2140        | 2105         |
|                                  | LT 35 TD <sup>7)</sup>   | 80 kW   | 5-speed | 1865  | 1500/2300                            | 1635          | 3500                        | 4875               | 2140        | 2105         |
|                                  | LT 35 TD <sup>5)</sup>   | 80 kW   | 5-speed | 1830  | 1500/2240                            | 1670          | 3500                        | 4875               | 2140        | 2105         |
| Pick-up,<br>wheelbase<br>2950 mm | LT 28                    | 66 kW   | 4-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 5630               | 2140        | 2105         |
|                                  | LT 28                    | 66 kW   | 5-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 5630               | 2140        | 2105         |
|                                  | LT 28 Cat.               | 69 kW   | 4-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 5630               | 2140        | 2105         |
|                                  | LT 28 Cat.               | 69 kW   | 5-speed | 1745  | 1500/1680                            | 1055          | 2800                        | 5630               | 2140        | 2105         |
|                                  | LT 28 D                  | 51 kW   | 5-speed | 1800  | 1500/1680                            | 1000          | 2800                        | 5630               | 2140        | 2105         |
|                                  | LT 28 D                  | 57 kW   | 5-speed | 1800  | 1500/1680                            | 1000          | 2800                        | 5630               | 2140        | 2105         |
|                                  | LT 28 TD                 | 68 kW   | 5-speed | 1815  | 1500/1680                            | 985           | 2800                        | 5630               | 2140        | 2105         |
|                                  | LT 28 TD                 | 80 kW   | 5-speed | 1815  | 1500/1680                            | 985           | 2800                        | 5630               | 2140        | 2105         |
|                                  | LT 31                    | 66 kW   | 4-speed | 1775  | 1500/1940                            | 1425          | 3200                        | 5630               | 2140        | 2105         |
|                                  | LT 31                    | 66 kW   | 5-speed | 1775  | 1500/1940                            | 1425          | 3200                        | 5630               | 2140        | 2105         |
|                                  | LT 31 Cat.               | 69 kW   | 4-speed | 1775  | 1500/1940                            | 1425          | 3200                        | 5630               | 2140        | 2105         |
|                                  | LT 31 Cat.               | 69 kW   | 5-speed | 1775  | 1500/1940                            | 1425          | 3200                        | 5630               | 2140        | 2105         |
|                                  | LT 31 D                  | 51 kW   | 5-speed | 1830  | 1500/1940                            | 1370          | 3200                        | 5630               | 2140        | 2105         |
|                                  | LT 31 D                  | 57 kW   | 5-speed | 1830  | 1500/1940                            | 1370          | 3200                        | 5630               | 2140        | 2105         |
|                                  | LT 31 TD                 | 68 kW   | 5-speed | 1865  | 1500/1940                            | 1335          | 3200                        | 5630               | 2140        | 2105         |
|                                  | LT 31 TD                 | 80 kW   | 5-speed | 1865  | 1500/1940                            | 1335          | 3200                        | 5630               | 2140        | 2105         |
|                                  | LT 35 <sup>7)</sup>      | 66 kW   | 4-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 <sup>5)</sup>      | 66 kW   | 4-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 <sup>7)</sup>      | 66 kW   | 5-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 <sup>5)</sup>      | 66 kW   | 5-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 <sup>7)</sup> Cat. | 69 kW   | 4-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 <sup>5)</sup> Cat. | 69 kW   | 4-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 <sup>7)</sup> Cat. | 69 kW   | 5-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 <sup>5)</sup> Cat. | 69 kW   | 5-speed | 1850  | 1500/2300                            | 1650          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 D <sup>7)</sup>    | 51 kW   | 5-speed | 1905  | 1500/2300                            | 1595          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 D <sup>5)</sup>    | 51 kW   | 5-speed | 1870  | 1500/2240                            | 1630          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 D <sup>7)</sup>    | 57 kW   | 5-speed | 1905  | 1500/2300                            | 1595          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 D <sup>5)</sup>    | 57 kW   | 5-speed | 1870  | 1500/2240                            | 1630          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 TD <sup>7)</sup>   | 68 kW   | 5-speed | 1920  | 1500/2300                            | 1580          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 TD <sup>5)</sup>   | 68 kW   | 5-speed | 1885  | 1500/2240                            | 1615          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 TD <sup>7)</sup>   | 80 kW   | 5-speed | 1920  | 1500/2300                            | 1580          | 3500                        | 5630               | 2140        | 2110         |
|                                  | LT 35 TD <sup>5)</sup>   | 80 kW   | 5-speed | 1885  | 1500/2240                            | 1615          | 3500                        | 5630               | 2140        | 2110         |
| LT 40                            | 66 kW                    | 5-speed | 1995    | 1600/2800   | 2005                                 | 4000          | 5630                        | 2140               | 2110        |              |
| LT 40 D                          | 55 kW                    | 5-speed | 2050    | 1600/2800   | 1950                                 | 4000          | 5630                        | 2140               | 2110        |              |
| LT 40 TD                         | 75 kW                    | 5-speed | 2065    | 1600/2800   | 1935                                 | 4000          | 5630                        | 2140               | 2110        |              |
| LT 45                            | 66 kW                    | 5-speed | 1995    | 1900/3100   | 2605                                 | 4600          | 5630                        | 2140               | 2110        |              |
| LT 45 D                          | 55 kW                    | 5-speed | 2050    | 1900/3100   | 2550                                 | 4600          | 5630                        | 2140               | 2110        |              |
| LT 45 TD                         | 75 kW                    | 5-speed | 2065    | 1900/3100   | 2535                                 | 4600          | 5630                        | 2140               | 2110        |              |
| LT 50                            | 66 kW                    | 5-speed | 2100    | 1900/3500   | 2900                                 | 5000          | 5630                        | 2140               | 2115        |              |
| LT 50 D                          | 55 kW                    | 5-speed | 2155    | 1900/3500   | 2845                                 | 5000          | 5630                        | 2140               | 2115        |              |
| LT 50 TD                         | 75 kW                    | 5-speed | 2170    | 1900/3500   | 2830                                 | 5000          | 5630                        | 2140               | 2115        |              |
| LT 55 D                          | 55 kW                    | 5-speed | 2155    | 1950/3700   | 3445                                 | 5600          | 5630                        | 2140               | 2140        |              |
| LT 55 TD                         | 75 kW                    | 5-speed | 2170    | 1950/3700   | 3430                                 | 5600          | 5630                        | 2140               | 2140        |              |
| Pick-up,<br>wheelbase<br>3650 mm | LT 40                    | 66 kW   | 5-speed | 2400  | 1900/2800                            | 1600          | 4000                        | 6545               | 2370        | 2115         |
|                                  | LT 40 D                  | 55 kW   | 5-speed | 2455  | 1900/2800                            | 1545          | 4000                        | 6545               | 2370        | 2115         |
|                                  | LT 40 TD                 | 75 kW   | 5-speed | 2470  | 1900/2800                            | 1530          | 4000                        | 6545               | 2370        | 2115         |
|                                  | LT 45                    | 66 kW   | 5-speed | 2400  | 1900/3100                            | 2200          | 4600                        | 6545               | 2370        | 2115         |
|                                  | LT 45 D                  | 55 kW   | 5-speed | 2455  | 1900/3100                            | 2145          | 4600                        | 6545               | 2370        | 2115         |
|                                  | LT 45 TD                 | 75 kW   | 5-speed | 2470  | 1900/3100                            | 2130          | 4600                        | 6545               | 2370        | 2115         |
|                                  | LT 50                    | 66 kW   | 5-speed | 2400  | 1900/3500                            | 2600          | 5000                        | 6545               | 2370        | 2115         |
|                                  | LT 50 D                  | 55 kW   | 5-speed | 2455  | 1900/3500                            | 2545          | 5000                        | 6545               | 2370        | 2115         |
|                                  | LT 50 TD                 | 75 kW   | 5-speed | 2470  | 1900/3500                            | 2530          | 5000                        | 6545               | 2370        | 2115         |
|                                  | LT 55 D                  | 55 kW   | 5-speed | 2455  | 1950/3700                            | 3145          | 5600                        | 6545               | 2370        | 2140         |
|                                  | LT 55 TD                 | 75 kW   | 5-speed | 2470  | 1950/3700                            | 3130          | 5600                        | 6545               | 2370        | 2140         |

\* Unladen weight without driver

<sup>7)</sup> Twin tyres

<sup>5)</sup> Single tyres

<sup>1)</sup> Extra equipment may increase the vehicle's unladen weight, in which case the payload limit must be reduced accordingly.

<sup>2)</sup> Calculated max. gradients at full payload on a good road.

All heights stated may vary by up to app. ± 30 mm depending on specification.

# Max. gradients

| Load space/area dimensions |             |              | Load space without/with tilt<br>m² | Load area<br>m² | Final drive ratios |      |      |       |      |      |       |       | Max. gradients<br>% |          |
|----------------------------|-------------|--------------|------------------------------------|-----------------|--------------------|------|------|-------|------|------|-------|-------|---------------------|----------|
| Length<br>mm               | Width<br>mm | Height<br>mm |                                    |                 | 39:8               | 40:9 | 41:7 | 41:10 | 43:8 | 45:7 | 53:13 | 53:14 |                     |          |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 37/34    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | 3.79  | —                   | 46/42/39 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 43/39    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 51/41    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 41/37/33 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 42/38/35 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 47       |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | —                   | 49/46    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 30/28    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | 3.79  | —                   | 38/34/32 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 34/31    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 40/37    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 34/31/28 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 35/32/29 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 39       |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | —                   | 41/38    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 29/27    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 28/26    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 40/36/33 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 39/35/32 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 31/28    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 30/27    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 36/33/30 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 35/32/29 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 30/27/24 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | —     | —    | —    | —     | —     | —                   | 29/26    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | —     | —    | —    | —     | —     | —                   | 33/30    |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 32/29/35 |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 34       |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 33       |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 37       |
| 2990                       | 2015        | 400          | 2.4/10.08                          | 6.0             | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | —                   | 36/34    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 37/34    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | 3.79  | —                   | 46/42/39 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 43/39    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 51/41    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 41/37/33 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 42/38/35 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 47       |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | —                   | 49/46    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 30/28    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | 3.79  | —                   | 38/34/32 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 34/31    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 40/37/34 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 34/31/28 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 35/32/29 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 39       |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | —                   | 41/38    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 29/27    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 28/26    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 40/36/33 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 39/35/32 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 31/28    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 30/27    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 36/33/40 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 35/32/39 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 30/27/24 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | —     | —    | —    | —     | —     | —                   | 29/26    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | —                   | 33/30/28 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 32/29/35 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 34       |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 33       |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | —    | 4.08  | —     | —                   | 37       |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | —                   | 36/34    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | —                   | 35/38    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | —    | 5.86 | —     | 5.38 | —    | —     | —     | —                   | 27/33/30 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 38/35/42 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | —                   | 29/32    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | —    | 5.86 | —     | 5.38 | —    | —     | —     | —                   | 23/28/26 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 33/30/36 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | —                   | 27/30    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | 5.86 | —     | 5.38 | 6.43 | —     | —     | —                   | 26/24    |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 30/27/33 |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | —                  | —    | —    | —     | —    | 6.43 | —     | —     | —                   | 25       |
| 3750                       | 2015        | 400          | 3.0/13.6                           | 7.6             | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 27/24/30 |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | —                   | 35/38    |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | —    | 5.86 | —     | 5.38 | —    | —     | —     | —                   | 27/33/30 |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 38/35/42 |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | —                   | 29/32    |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | —    | 5.86 | —     | 5.38 | —    | —     | —     | —                   | 23/28/26 |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 33/30/36 |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | —                   | 27/30    |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | —                  | —    | 5.86 | —     | 5.38 | 6.43 | —     | —     | —                   | 26/24    |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 30/27/33 |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | —                  | —    | —    | —     | —    | 6.43 | —     | —     | —                   | 25       |
| 4600                       | 2200        | 400          | 4.05/18.21                         | 10.12           | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | —                   | 27/24/30 |

|   | Model                    | Engine  | Gearbox | Unladen weight <sup>1)</sup><br>with driver<br>kg | Axle load limits<br>front/rear<br>kg | Payload<br>kg | Gross weight<br>limit<br>kg | Overall dimensions |             |              |
|---|--------------------------|---------|---------|---|--------------------------------------|---------------|-----------------------------|--------------------|-------------|--------------|
|   |                          |         |         |   |                                      |               |                             | Length<br>mm       | Width<br>mm | Height<br>mm |
| Low-loader pick-up,<br>wheelbase<br>2500 mm | LT 28                    | 66 kW   | 4-speed | 1680  | 1500/1680                            | 1120          | 2800                        | 4875               | 2140        | 2105         |
|   | LT 28                    | 66 kW   | 5-speed | 1680  | 1500/1680                            | 1120          | 2800                        | 4875               | 2140        | 2105         |
|   | LT 28 Cat.               | 69 kW   | 4-speed | 1680  | 1500/1680                            | 1120          | 2800                        | 4875               | 2140        | 2105         |
|   | LT 28 Cat.               | 69 kW   | 5-speed | 1680  | 1500/1680                            | 1120          | 2800                        | 4875               | 2140        | 2105         |
|   | LT 28 D                  | 51 kW   | 5-speed | 1735  | 1500/1680                            | 1065          | 2800                        | 4875               | 2140        | 2105         |
|   | LT 28 D                  | 57 kW   | 5-speed | 1735  | 1500/1680                            | 1065          | 2800                        | 4875               | 2140        | 2105         |
|   | LT 28 TD                 | 68 kW   | 5-speed | 1750  | 1500/1680                            | 1050          | 2800                        | 4875               | 2140        | 2105         |
|   | LT 28 TD                 | 80 kW   | 5-speed | 1750  | 1500/1680                            | 1050          | 2800                        | 4875               | 2140        | 2105         |
|   | LT 31                    | 66 kW   | 4-speed | 1710  | 1500/1940                            | 1490          | 3200                        | 4875               | 2140        | 2105         |
|   | LT 31                    | 66 kW   | 5-speed | 1710  | 1500/1940                            | 1490          | 3200                        | 4875               | 2140        | 2105         |
|   | LT 31 Cat.               | 69 kW   | 4-speed | 1710  | 1500/1940                            | 1490          | 3200                        | 4875               | 2140        | 2105         |
|   | LT 31 Cat.               | 69 kW   | 5-speed | 1710  | 1500/1940                            | 1490          | 3200                        | 4875               | 2140        | 2105         |
|   | LT 31 D                  | 51 kW   | 5-speed | 1765  | 1500/1940                            | 1435          | 3200                        | 4875               | 2140        | 2105         |
|   | LT 31 D                  | 57 kW   | 5-speed | 1765  | 1500/1940                            | 1435          | 3200                        | 4875               | 2140        | 2105         |
|   | LT 31 TD                 | 68 kW   | 5-speed | 1800  | 1500/1940                            | 1400          | 3200                        | 4875               | 2140        | 2105         |
|   | LT 31 TD                 | 80 kW   | 5-speed | 1800  | 1500/1940                            | 1400          | 3200                        | 4875               | 2140        | 2105         |
|   | LT 35 <sup>§)</sup>      | 66 kW   | 4-speed | 1750  | 1500/2240                            | 1750          | 3500                        | 4875               | 2140        | 2105         |
|   | LT 35 <sup>§)</sup>      | 66 kW   | 5-speed | 1750  | 1500/2240                            | 1750          | 3500                        | 4875               | 2140        | 2105         |
|   | LT 35 Cat. <sup>§)</sup> | 69 kW   | 4-speed | 1750  | 1500/2240                            | 1750          | 3500                        | 4875               | 2140        | 2105         |
|   | LT 35 Cat. <sup>§)</sup> | 69 kW   | 5-speed | 1750  | 1500/2240                            | 1750          | 3500                        | 4875               | 2140        | 2105         |
|   | LT 35 D <sup>§)</sup>    | 51 kW   | 5-speed | 1805  | 1500/2240                            | 1695          | 3500                        | 4875               | 2140        | 2105         |
|   | LT 35 D <sup>§)</sup>    | 57 kW   | 5-speed | 1805  | 1500/2240                            | 1695          | 3500                        | 4875               | 2140        | 2105         |
|   | LT 35 TD <sup>§)</sup>   | 68 kW   | 5-speed | 1820  | 1500/2240                            | 1680          | 3500                        | 4875               | 2140        | 2105         |
| LT 35 TD <sup>§)</sup>                      | 80 kW                    | 5-speed | 1820    | 1500/2240   | 1680                                 | 3500          | 4875                        | 2140               | 2105        |              |

<sup>1)</sup> Twin tyres  
<sup>§)</sup> Single tyres

<sup>1)</sup> Extra equipment may increase the vehicle's unladen weight, in which case the payload limit must be reduced accordingly.

<sup>1)</sup> Calculated max. gradients at full payload on a good road.

All heights stated may vary by up to app. ± 30 mm depending on specification.

# Max. gradients

| Load space/area dimensions |             |              | Load space<br>without/with tilt<br>m <sup>3</sup> | Load<br>area<br>m <sup>2</sup> | Final drive ratios |      |      |       |      |      |       |       | Max.<br>gradients<br>% <sup>2)</sup> |
|----------------------------|-------------|--------------|---|--------------------------------|--------------------|------|------|-------|------|------|-------|-------|--------------------------------------|
| Length<br>mm               | Width<br>mm | Height<br>mm |   |                                | 39:8               | 40:9 | 41:7 | 41:10 | 43:8 | 45:7 | 53:13 | 53:14 |                                      |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 37/34                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | 4.44 | —    | 4.10  | —    | —    | —     | 3.79  | 46/42/39                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 43/39                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 51/41                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 41/37/33                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 42/38/35                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 47                                   |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 49/46                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 30/28                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 38/34                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 34/31                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 40/37/34                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 34/31/28                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 35/32/29                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 39                                   |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 41/38                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 28/26                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 39/35/32                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 30/27                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 35/32/29                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | —     | —    | —    | —     | —     | 29/26                                |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 32/29/35                             |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 33                                   |
| 2990                       | 2015        | 400          | 2.4/10.8  | 6.0                            | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 36/34                                |

|  | Model                    | Engine  | Gearbox | Unladen weight <sup>1)</sup><br>with driver<br>kg | Axle load limits<br>front/rear<br>kg | Payload<br>kg | Gross weight<br>limit<br>kg | Overall dimensions |             |              |
|--|--------------------------|---------|---------|---|--------------------------------------|---------------|-----------------------------|--------------------|-------------|--------------|
|  |                          |         |         |   |                                      |               |                             | Length<br>mm       | Width<br>mm | Height<br>mm |
| <b>Double-cab pick-up,<br/>wheelbase<br/>2950 mm</b>                     | LT 28                    | 66 kW   | 4-speed | 1885  | 1500/1680                            | 915           | 2800                        | 5330               | 2140        | 2140         |
|  | LT 28                    | 66 kW   | 5-speed | 1885  | 1500/1680                            | 915           | 2800                        | 5330               | 2140        | 2140         |
|  | LT 28 Cat.               | 69 kW   | 4-speed | 1885  | 1500/1680                            | 915           | 2800                        | 5330               | 2140        | 2140         |
|  | LT 28 Cat.               | 69 kW   | 5-speed | 1885  | 1500/1680                            | 915           | 2800                        | 5330               | 2140        | 2140         |
|  | LT 28 D                  | 51 kW   | 5-speed | 1940  | 1500/1680                            | 860           | 2800                        | 5330               | 2140        | 2140         |
|  | LT 28 D                  | 57 kW   | 5-speed | 1940  | 1500/1680                            | 860           | 2800                        | 5330               | 2140        | 2140         |
|  | LT 28 TD                 | 68 kW   | 5-speed | 1955  | 1500/1680                            | 845           | 2800                        | 5330               | 2140        | 2140         |
|  | LT 28 TD                 | 80 kW   | 5-speed | 1955  | 1500/1680                            | 845           | 2800                        | 5330               | 2140        | 2140         |
|  | LT 31                    | 66 kW   | 4-speed | 1915  | 1500/1940                            | 1285          | 3200                        | 5330               | 2140        | 2140         |
|  | LT 31                    | 66 kW   | 5-speed | 1915  | 1500/1940                            | 1285          | 3200                        | 5330               | 2140        | 2140         |
|  | LT 31 Cat.               | 69 kW   | 4-speed | 1915  | 1500/1940                            | 1285          | 3200                        | 5330               | 2140        | 2140         |
|  | LT 31 Cat.               | 69 kW   | 5-speed | 1915  | 1500/1940                            | 1285          | 3200                        | 5330               | 2140        | 2140         |
|  | LT 31 D                  | 51 kW   | 5-speed | 1970  | 1500/1940                            | 1230          | 3200                        | 5330               | 2140        | 2140         |
|  | LT 31 D                  | 57 kW   | 5-speed | 1970  | 1500/1940                            | 1230          | 3200                        | 5330               | 2140        | 2140         |
|  | LT 31 TD                 | 68 kW   | 5-speed | 1985  | 1500/1940                            | 1215          | 3200                        | 5330               | 2140        | 2140         |
|  | LT 31 TD                 | 80 kW   | 5-speed | 1985  | 1500/1940                            | 1215          | 3200                        | 5330               | 2140        | 2140         |
|  | LT 35 <sup>2)</sup>      | 66 kW   | 4-speed | 1970  | 1500/2350                            | 1530          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 <sup>3)</sup>      | 66 kW   | 4-speed | 1970  | 1500/2350                            | 1530          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 <sup>2)</sup>      | 66 kW   | 5-speed | 1970  | 1500/2350                            | 1530          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 <sup>3)</sup>      | 66 kW   | 5-speed | 1970  | 1500/2350                            | 1530          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 <sup>2)</sup> Cat. | 69 kW   | 4-speed | 1970  | 1500/2350                            | 1530          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 <sup>3)</sup> Cat. | 69 kW   | 4-speed | 1970  | 1500/2350                            | 1530          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 <sup>2)</sup> Cat. | 69 kW   | 5-speed | 1970  | 1500/2350                            | 1530          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 <sup>3)</sup> Cat. | 69 kW   | 5-speed | 1970  | 1500/2350                            | 1530          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 D <sup>2)</sup>    | 51 kW   | 5-speed | 2025  | 1500/2350                            | 1475          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 D <sup>3)</sup>    | 51 kW   | 5-speed | 1990  | 1500/2240                            | 1510          | 3500                        | 5330               | 2140        | 2140         |
|  | LT 35 D <sup>2)</sup>    | 57 kW   | 5-speed | 2025  | 1500/2350                            | 1475          | 3500                        | 5330               | 2140        | 2085         |
|  | LT 35 D <sup>3)</sup>    | 57 kW   | 5-speed | 1990  | 1500/2240                            | 1510          | 3500                        | 5330               | 2140        | 2140         |
|  | LT 35 TD <sup>2)</sup>   | 68 kW   | 5-speed | 2040  | 1500/2350                            | 1460          | 3500                        | 5330               | 2140        | 2140         |
|  | LT 35 TD <sup>3)</sup>   | 68 kW   | 5-speed | 2005  | 1500/2240                            | 1495          | 3500                        | 5330               | 2140        | 2140         |
|  | LT 35 TD <sup>2)</sup>   | 80 kW   | 5-speed | 2040  | 1500/2350                            | 1460          | 3500                        | 5330               | 2140        | 2140         |
|  | LT 35 TD <sup>3)</sup>   | 80 kW   | 5-speed | 2005  | 1500/2240                            | 1495          | 3500                        | 5330               | 2140        | 2140         |
|  | LT 40                    | 66 kW   | 5-speed | 2080  | 1900/2800                            | 1920          | 4000                        | 5330               | 2140        | 2100         |
|  | LT 40 D                  | 55 kW   | 5-speed | 2135  | 1900/2800                            | 1865          | 4000                        | 5330               | 2140        | 2100         |
|  | LT 40 TD                 | 75 kW   | 5-speed | 2150  | 1900/2800                            | 1850          | 4000                        | 5330               | 2140        | 2100         |
|  | LT 45                    | 66 kW   | 5-speed | 2180  | 1900/3500                            | 2420          | 4600                        | 5330               | 2140        | 2100         |
|  | LT 45 D                  | 55 kW   | 5-speed | 2235  | 1900/3500                            | 2365          | 4600                        | 5330               | 2140        | 2100         |
|  | LT 45 TD                 | 75 kW   | 5-speed | 2250  | 1900/3500                            | 2350          | 4600                        | 5330               | 2140        | 2100         |
|  | LT 50                    | 66 kW   | 5-speed | 2180  | 1900/3500                            | 2820          | 5000                        | 5330               | 2140        | 2100         |
|  | LT 50 D                  | 55 kW   | 5-speed | 2235  | 1900/3500                            | 2765          | 5000                        | 5330               | 2140        | 2100         |
| LT 50 TD   | 75 kW                    | 5-speed | 2250    | 1900/3500   | 2750                                 | 5000          | 5330                        | 2140               | 2100        |              |
| <b>Double-cab pick-up,<br/>wheelbase<br/>3650 mm</b>                     | LT 40                    | 66 kW   | 5-speed | 2200  | 1900/2800                            | 1700          | 4000                        | 6560               | 2140        | 2115         |
|  | LT 40 D                  | 55 kW   | 5-speed | 2355  | 1900/2800                            | 1645          | 4000                        | 6560               | 2140        | 2115         |
|  | LT 40 TD                 | 75 kW   | 5-speed | 2370  | 1900/2800                            | 1630          | 4000                        | 6560               | 2140        | 2115         |
|  | LT 45                    | 66 kW   | 5-speed | 2300  | 1900/3500                            | 2300          | 4600                        | 6560               | 2140        | 2115         |
|  | LT 45 D                  | 55 kW   | 5-speed | 2355  | 1900/3500                            | 2245          | 4600                        | 6560               | 2140        | 2115         |
|  | LT 45 TD                 | 75 kW   | 5-speed | 2370  | 1900/3500                            | 2230          | 4600                        | 6560               | 2140        | 2115         |
|  | LT 50                    | 66 kW   | 5-speed | 2300  | 1900/3500                            | 2700          | 5000                        | 6560               | 2140        | 2115         |
|  | LT 50 D                  | 55 kW   | 5-speed | 2355  | 1900/3500                            | 2645          | 5000                        | 6560               | 2140        | 2115         |
|  | LT 50 TD                 | 75 kW   | 5-speed | 2370  | 1900/3500                            | 2630          | 5000                        | 6560               | 2140        | 2115         |
|  | LT 55 D                  | 55 kW   | 5-speed | 2355  | 1950/3700                            | 3245          | 5600                        | 6560               | 2140        | 2140         |
| LT 55 TD   | 75 kW                    | 5-speed | 2370    | 1950/3700   | 3230                                 | 5600          | 6560                        | 2140               | 2140        |              |
| <b>Low-loader pick-up<br/>with double cab,<br/>wheelbase<br/>2950 mm</b> | LT 28                    | 66 kW   | 4-speed | 1875  | 1500/1680                            | 925           | 2800                        | 5330               | 2140        | 2105         |
|  | LT 28                    | 66 kW   | 5-speed | 1875  | 1500/1680                            | 925           | 2800                        | 5330               | 2140        | 2105         |
|  | LT 28 Cat.               | 69 kW   | 4-speed | 1875  | 1500/1680                            | 925           | 2800                        | 5330               | 2140        | 2105         |
|  | LT 28 Cat.               | 69 kW   | 5-speed | 1875  | 1500/1680                            | 925           | 2800                        | 5330               | 2140        | 2105         |
|  | LT 28 D                  | 51 kW   | 5-speed | 1930  | 1500/1680                            | 870           | 2800                        | 5330               | 2140        | 2105         |
|  | LT 28 D                  | 57 kW   | 5-speed | 1930  | 1500/1680                            | 870           | 2800                        | 5330               | 2140        | 2105         |
|  | LT 28 TD                 | 68 kW   | 5-speed | 1945  | 1500/1680                            | 855           | 2800                        | 5330               | 2140        | 2105         |
|  | LT 28 TD                 | 80 kW   | 5-speed | 1945  | 1500/1680                            | 855           | 2800                        | 5330               | 2140        | 2105         |
|  | LT 31                    | 66 kW   | 4-speed | 1905  | 1500/1940                            | 1295          | 3200                        | 5330               | 2140        | 2105         |
|  | LT 31                    | 66 kW   | 5-speed | 1905  | 1500/1940                            | 1295          | 3200                        | 5330               | 2140        | 2105         |
|  | LT 31 Cat.               | 69 kW   | 4-speed | 1905  | 1500/1940                            | 1295          | 3200                        | 5330               | 2140        | 2105         |
|  | LT 31 Cat.               | 69 kW   | 5-speed | 1905  | 1500/1940                            | 1295          | 3200                        | 5330               | 2140        | 2105         |
|  | LT 31 D                  | 51 kW   | 5-speed | 1960  | 1500/1940                            | 1240          | 3200                        | 5330               | 2140        | 2105         |
|  | LT 31 D                  | 57 kW   | 5-speed | 1960  | 1500/1940                            | 1240          | 3200                        | 5330               | 2140        | 2105         |
|  | LT 31 TD                 | 68 kW   | 5-speed | 1975  | 1500/1940                            | 1225          | 3200                        | 5330               | 2140        | 2105         |
|  | LT 31 TD                 | 80 kW   | 5-speed | 1975  | 1500/1940                            | 1225          | 3200                        | 5330               | 2140        | 2105         |
|  | LT 35 <sup>2)</sup>      | 66 kW   | 4-speed | 1925  | 1500/2240                            | 1575          | 3500                        | 5330               | 2140        | 2105         |
|  | LT 35 <sup>3)</sup>      | 66 kW   | 5-speed | 1925  | 1500/2240                            | 1575          | 3500                        | 5330               | 2140        | 2105         |
|  | LT 35 Cat. <sup>2)</sup> | 69 kW   | 4-speed | 1925  | 1500/2240                            | 1575          | 3500                        | 5330               | 2140        | 2105         |
|  | LT 35 Cat. <sup>3)</sup> | 69 kW   | 5-speed | 1925  | 1500/2240                            | 1575          | 3500                        | 5330               | 2140        | 2105         |
| LT 35 D <sup>2)</sup>  | 51 kW                    | 5-speed | 1980    | 1500/2240   | 1520                                 | 3500          | 5330                        | 2140               | 2105        |              |
| LT 35 D <sup>3)</sup>  | 57 kW                    | 5-speed | 1980    | 1500/2240   | 1520                                 | 3500          | 5330                        | 2140               | 2105        |              |
| LT 35 TD <sup>2)</sup>   | 68 kW                    | 5-speed | 1995    | 1500/2240   | 1505                                 | 3500          | 5330                        | 2140               | 2105        |              |
| LT 35 TD <sup>3)</sup>   | 80 kW                    | 5-speed | 1995    | 1500/2240   | 1505                                 | 3500          | 5330                        | 2140               | 2105        |              |

<sup>1)</sup> Twin tyres  
<sup>2)</sup> Single tyres

<sup>3)</sup> Extra equipment may increase the vehicle's unladen weight, in which case the payload limit must be reduced accordingly.

<sup>4)</sup> Calculated max. gradients at full payload on a good road.

All heights stated may vary by up to app. ± 30 mm depending on specification.

# Max. gradients

| Load space/area dimensions |             |              | Load space without/with tilt<br>m <sup>2</sup> | Load area<br>m <sup>2</sup> | Final drive ratios |      |      |       |      |      |       |       | Max. gradients<br>% <sup>2)</sup> |
|----------------------------|-------------|--------------|--|-----------------------------|--------------------|------|------|-------|------|------|-------|-------|-----------------------------------|
| Length<br>mm               | Width<br>mm | Height<br>mm |  |                             | 39:8               | 40:9 | 41:7 | 41:10 | 43:8 | 45:7 | 53:13 | 53:14 |                                   |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 37/34                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | 3.79  | 46/42/39                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 43/39                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 51/41                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 41/37/33                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 42/38/35                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 47                                |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 49/46                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 30/28                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 38/34                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 34/31                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 40/37/34                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 34/31/28                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 35/32/29                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 39                                |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 41/38                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 29/27                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 28/26                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 40/36/33                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 39/35/32                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 31/28                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 30/27                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 36/33/30                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 35/32/29                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 30/27/24                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | —     | —    | —    | —     | —     | 29/26                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | —     | —    | —    | —     | —     | 33/30                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | 32/35                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 34                                |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 33                                |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 37                                |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 36/34                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | 36/38                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | —    | 5.86 | —     | 5.38 | —    | —     | —     | 27/33/30                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 38/35/42                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | 29/32                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | —    | 5.86 | —     | 5.38 | —    | —     | —     | 23/28/26                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 33/30/36                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | 27/30                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | 5.86 | —     | 5.38 | 6.43 | —     | —     | 26/24                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 30/27/33                          |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | 35/38                             |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | —    | 5.86 | —     | 5.38 | —    | —     | —     | 27/33/30                          |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 38/35/42                          |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | 29/32                             |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | —    | 5.86 | —     | 5.38 | —    | —     | —     | 23/28/26                          |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 33/30/36                          |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | —    | —    | —     | 5.38 | —    | —     | —     | 27/30                             |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | —                  | —    | 5.86 | —     | 5.38 | 6.43 | —     | —     | 26/24                             |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 30/27/33                          |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | —                  | —    | —    | —     | 5.38 | 6.43 | —     | —     | 25                                |
| 3750                       | 2015        | 400          | 3.0/13.6                                       | 7.6                         | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 27/24/30                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 37/34                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | 3.79  | 46/42/39                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 43/39                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 51/41                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 41/37/33                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 42/38/35                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 47                                |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 49/46                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 30/28                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 38/34                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 34/31                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 40/37/34                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 34/31/27                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 35/32/29                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 39                                |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 41/38                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 28/26                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 39/35/32                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | 4.44 | —    | 4.10  | —    | —    | —     | —     | 30/27                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | 4.10  | —    | —    | —     | —     | 35/32/39                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | —     | —    | —    | —     | —     | 29/26                             |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | 4.88               | 4.44 | —    | —     | 5.38 | —    | —     | —     | 32/29/35                          |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | —     | 33                                |
| 2515                       | 2015        | 400          | 2.03/9.12                                      | 5.07                        | —                  | —    | —    | —     | —    | —    | 4.08  | 3.79  | 36/34                             |

|  | Model  | Engine     | Gearbox | Unladen weight <sup>1)</sup><br>with driver<br>kg | Axle load limits<br>front/rear<br>kg | Payload<br>kg | Gross weight<br>limit<br>kg | Overall dimensions |             |              |      |
|--|--|------------|---------|---|--------------------------------------|---------------|-----------------------------|--------------------|-------------|--------------|------|
|  |  |            |         |   |                                      |               |                             | Length<br>mm       | Width<br>mm | Height<br>mm |      |
| <b>Chassis<br/>with cab,<br/>wheelbase<br/>2500 mm</b> | LT 28  | 66 kW      | 4-speed | 1460  | 1500/1680                            | 1340          | 2800                        | 4795               | 2040        | 2110         |      |
|  | LT 28  | 66 kW      | 5-speed | 1460  | 1500/1680                            | 1340          | 2800                        | 4795               | 2040        | 2110         |      |
|  | LT 28 Cat.   | 69 kW      | 4-speed | 1460  | 1500/1680                            | 1340          | 2800                        | 4795               | 2040        | 2110         |      |
|  | LT 28 Cat.   | 69 kW      | 5-speed | 1460  | 1500/1680                            | 1340          | 2800                        | 4795               | 2040        | 2110         |      |
|  | LT 28 D  | 51 kW      | 5-speed | 1515  | 1500/1680                            | 1285          | 2800                        | 4795               | 2040        | 2110         |      |
|  | LT 28 D  | 57 kW      | 5-speed | 1515  | 1500/1680                            | 1285          | 2800                        | 4795               | 2040        | 2110         |      |
|  | LT 28 TD   | 68 kW      | 5-speed | 1530  | 1500/1680                            | 1270          | 2800                        | 4795               | 2040        | 2110         |      |
|  | LT 28 TD   | 80 kW      | 5-speed | 1530  | 1500/1680                            | 1270          | 2800                        | 4795               | 2040        | 2110         |      |
|  | LT 31  | 66 kW      | 4-speed | 1510  | 1500/1940                            | 1690          | 3200                        | 4795               | 2040        | 2110         |      |
|  | LT 31  | 66 kW      | 5-speed | 1510  | 1500/1940                            | 1690          | 3200                        | 4795               | 2040        | 2110         |      |
|  | LT 31 Cat.   | 69 kW      | 4-speed | 1510  | 1500/1940                            | 1690          | 3200                        | 4795               | 2040        | 2110         |      |
|  | LT 31 Cat.   | 69 kW      | 5-speed | 1510  | 1500/1940                            | 1690          | 3200                        | 4795               | 2040        | 2110         |      |
|  | LT 31 D  | 51 kW      | 5-speed | 1565  | 1500/1940                            | 1635          | 3200                        | 4795               | 2040        | 2110         |      |
|  | LT 31 D  | 57 kW      | 5-speed | 1565  | 1500/1940                            | 1635          | 3200                        | 4795               | 2040        | 2110         |      |
|  | LT 31 TD   | 68 kW      | 5-speed | 1580  | 1500/1940                            | 1620          | 3200                        | 4795               | 2040        | 2110         |      |
|  | LT 31 TD   | 80 kW      | 5-speed | 1580  | 1500/1940                            | 1620          | 3200                        | 4795               | 2040        | 2110         |      |
|  | LT 35 <sup>7)</sup>                                    | 66 kW      | 4-speed | 1565  | 1500/2300                            | 1935          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 <sup>8)</sup>                                    | 66 kW      | 4-speed | 1565  | 1500/2300                            | 1935          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 <sup>7)</sup>                                    | 66 kW      | 5-speed | 1565  | 1500/2300                            | 1935          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 <sup>8)</sup>                                    | 66 kW      | 5-speed | 1565  | 1500/2300                            | 1935          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 <sup>7)</sup> Cat.                               | 69 kW      | 4-speed | 1565  | 1500/2300                            | 1935          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 <sup>8)</sup> Cat.                               | 69 kW      | 4-speed | 1565  | 1500/2300                            | 1935          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 <sup>7)</sup> Cat.                               | 69 kW      | 5-speed | 1565  | 1500/2300                            | 1935          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 <sup>8)</sup> Cat.                               | 69 kW      | 5-speed | 1565  | 1500/2300                            | 1935          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 D <sup>7)</sup>                                  | 51 kW      | 5-speed | 1620  | 1500/2300                            | 1880          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 D <sup>8)</sup>                                  | 51 kW      | 5-speed | 1585  | 1500/2240                            | 1915          | 3500                        | 4795               | 2040        | 2110         |      |
|  | LT 35 D <sup>7)</sup>                                  | 57 kW      | 5-speed | 1620  | 1500/2300                            | 1880          | 3500                        | 4795               | 2050        | 2115         |      |
|  | LT 35 D <sup>8)</sup>                                  | 57 kW      | 5-speed | 1585  | 1500/2240                            | 1915          | 3500                        | 4795               | 2040        | 2110         |      |
|  | LT 35 TD <sup>7)</sup>                                 | 68 kW      | 5-speed | 1635  | 1500/2300                            | 1865          | 3500                        | 4795               | 2040        | 2110         |      |
|  | LT 35 TD <sup>8)</sup>                                 | 68 kW      | 5-speed | 1600  | 1500/2240                            | 1900          | 3500                        | 4795               | 2040        | 2110         |      |
|  | LT 35 TD <sup>7)</sup>                                 | 80 kW      | 5-speed | 1635  | 1500/2350                            | 1865          | 3500                        | 4795               | 2040        | 2110         |      |
|  | LT 35 TD <sup>8)</sup>                                 | 80 kW      | 5-speed | 1600  | 1500/2240                            | 1900          | 3500                        | 4795               | 2040        | 2110         |      |
|  | <b>Chassis<br/>with cab,<br/>wheelbase<br/>2950 mm</b> | LT 28      | 66 kW   | 4-speed   | 1495                                 | 1500/1680     | 1305                        | 2800               | 5245        | 2040         | 2110 |
|  |  | LT 28      | 66 kW   | 5-speed   | 1495                                 | 1500/1680     | 1305                        | 2800               | 5245        | 2040         | 2110 |
|  |  | LT 28 Cat. | 69 kW   | 4-speed   | 1495                                 | 1500/1680     | 1305                        | 2800               | 5245        | 2040         | 2110 |
| LT 28 Cat.   |  | 69 kW      | 5-speed | 1495  | 1500/1680                            | 1305          | 2800                        | 5245               | 2040        | 2110         |      |
| LT 28 D  |  | 51 kW      | 5-speed | 1550  | 1500/1680                            | 1250          | 2800                        | 5245               | 2040        | 2110         |      |
| LT 28 D  |  | 57 kW      | 5-speed | 1550  | 1500/1680                            | 1250          | 2800                        | 5245               | 2040        | 2110         |      |
| LT 28 TD   |  | 68 kW      | 5-speed | 1565  | 1500/1680                            | 1235          | 2800                        | 5245               | 2040        | 2110         |      |
| LT 28 TD   |  | 80 kW      | 5-speed | 1565  | 1500/1680                            | 1235          | 2800                        | 5245               | 2040        | 2110         |      |
| LT 31  |  | 66 kW      | 4-speed | 1545  | 1500/1940                            | 1655          | 3200                        | 5245               | 2040        | 2110         |      |
| LT 31  |  | 66 kW      | 5-speed | 1545  | 1500/1940                            | 1655          | 3200                        | 5245               | 2040        | 2110         |      |
| LT 31 Cat.   |  | 69 kW      | 4-speed | 1545  | 1500/1940                            | 1655          | 3200                        | 5245               | 2040        | 2110         |      |
| LT 31 Cat.   |  | 69 kW      | 5-speed | 1545  | 1500/1940                            | 1655          | 3200                        | 5245               | 2040        | 2110         |      |
| LT 31 D  |  | 51 kW      | 5-speed | 1600  | 1500/1940                            | 1600          | 3200                        | 5245               | 2040        | 2110         |      |
| LT 31 D  |  | 57 kW      | 5-speed | 1600  | 1500/1940                            | 1600          | 3200                        | 5245               | 2040        | 2110         |      |
| LT 31 TD   |  | 68 kW      | 5-speed | 1615  | 1500/1940                            | 1585          | 3200                        | 5245               | 2040        | 2110         |      |
| LT 31 TD   |  | 80 kW      | 5-speed | 1615  | 1500/1940                            | 1585          | 3200                        | 5245               | 2040        | 2110         |      |
| LT 35 <sup>7)</sup>                                    |  | 66 kW      | 4-speed | 1600  | 1500/2300                            | 1900          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 <sup>8)</sup>                                    |  | 66 kW      | 4-speed | 1600  | 1500/2300                            | 1900          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 <sup>7)</sup>                                    |  | 66 kW      | 5-speed | 1600  | 1500/2300                            | 1900          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 <sup>8)</sup>                                    |  | 66 kW      | 5-speed | 1600  | 1500/2300                            | 1900          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 <sup>7)</sup> Cat.                               |  | 69 kW      | 4-speed | 1600  | 1500/2300                            | 1900          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 <sup>8)</sup> Cat.                               |  | 69 kW      | 4-speed | 1600  | 1500/2300                            | 1900          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 <sup>7)</sup> Cat.                               |  | 69 kW      | 5-speed | 1600  | 1500/2300                            | 1900          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 <sup>8)</sup> Cat.                               |  | 69 kW      | 5-speed | 1600  | 1500/2300                            | 1900          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 D <sup>7)</sup>                                  |  | 51 kW      | 5-speed | 1655  | 1500/2300                            | 1845          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 D <sup>8)</sup>                                  |  | 51 kW      | 5-speed | 1620  | 1500/2240                            | 1880          | 3500                        | 5245               | 2040        | 2110         |      |
| LT 35 D <sup>7)</sup>                                  |  | 57 kW      | 5-speed | 1655  | 1500/2300                            | 1845          | 3500                        | 5245               | 2050        | 2115         |      |
| LT 35 D <sup>8)</sup>                                  |  | 57 kW      | 5-speed | 1620  | 1500/2240                            | 1880          | 3500                        | 5245               | 2040        | 2110         |      |
| LT 35 TD <sup>7)</sup>                                 |  | 68 kW      | 5-speed | 1670  | 1500/2300                            | 1830          | 3500                        | 5245               | 2040        | 2110         |      |
| LT 35 TD <sup>8)</sup>                                 |  | 68 kW      | 5-speed | 1635  | 1500/2240                            | 1865          | 3500                        | 5245               | 2040        | 2110         |      |
| LT 35 TD <sup>7)</sup>                                 |  | 80 kW      | 5-speed | 1670  | 1500/2300                            | 1830          | 3500                        | 5245               | 2040        | 2110         |      |
| LT 35 TD <sup>8)</sup>                                 |  | 80 kW      | 5-speed | 1635  | 1500/2240                            | 1865          | 3500                        | 5245               | 2040        | 2110         |      |
| LT 40  |  | 66 kW      | 5-speed | 1745  | 1900/2800                            | 2255          | 4000                        | 5245               | 2050        | 2120         |      |
| LT 40 D  |  | 55 kW      | 5-speed | 1800  | 1900/2800                            | 2200          | 4000                        | 5245               | 2050        | 2120         |      |
| LT 40 TD   |  | 75 kW      | 5-speed | 1815  | 1900/2800                            | 2185          | 4000                        | 5245               | 2050        | 2120         |      |
| LT 45  | 66 kW  | 5-speed    | 1745    | 1900/3100   | 2855                                 | 4600          | 5245                        | 2050               | 2120        |              |      |
| LT 45 D  | 55 kW  | 5-speed    | 1800    | 1900/3100   | 2800                                 | 4600          | 5245                        | 2050               | 2120        |              |      |
| LT 45 TD   | 75 kW  | 5-speed    | 1815    | 1900/3100   | 2785                                 | 4600          | 5245                        | 2050               | 2120        |              |      |
| LT 50  | 66 kW  | 5-speed    | 1850    | 1900/3500   | 3150                                 | 5000          | 5245                        | 2050               | 2120        |              |      |
| LT 50 D  | 55 kW  | 5-speed    | 1905    | 1900/3500   | 3095                                 | 5000          | 5245                        | 2050               | 2120        |              |      |
| LT 50 TD   | 75 kW  | 5-speed    | 1920    | 1900/3500   | 3080                                 | 5000          | 5245                        | 2050               | 2120        |              |      |
| LT 55 D  | 55 kW  | 5-speed    | 1905    | 1950/3700   | 3695                                 | 5600          | 5245                        | 2050               | 2145        |              |      |
| LT 55 TD   | 75 kW  | 5-speed    | 1920    | 1950/3700   | 3680                                 | 5600          | 5245                        | 2050               | 2145        |              |      |
| <b>Chassis<br/>with cab,<br/>wheelbase<br/>3650 mm</b> | LT 40  | 66 kW      | 5-speed | 1940  | 1900/2800                            | 2060          | 4000                        | 6240               | 2050        | 2115         |      |
|  | LT 40 D  | 55 kW      | 5-speed | 1995  | 1900/2800                            | 2005          | 4000                        | 6240               | 2050        | 2115         |      |
|  | LT 40 TD   | 75 kW      | 5-speed | 2010  | 1900/2800                            | 1990          | 4000                        | 6240               | 2050        | 2115         |      |
|  | LT 45  | 66 kW      | 5-speed | 1940  | 1900/3100                            | 2660          | 4600                        | 6240               | 2050        | 2115         |      |
|  | LT 45 D  | 55 kW      | 5-speed | 1995  | 1900/3100                            | 2605          | 4600                        | 6240               | 2050        | 2115         |      |
|  | LT 45 TD   | 75 kW      | 5-speed | 2010  | 1900/3100                            | 2590          | 4600                        | 6240               | 2050        | 2115         |      |
|  | LT 50  | 66 kW      | 5-speed | 1940  | 1900/3500                            | 3060          | 5000                        | 6240               | 2050        | 2115         |      |
|  | LT 50 D  | 55 kW      | 5-speed | 1995  | 1900/3500                            | 3005          | 5000                        | 6240               | 2050        | 2115         |      |
|  | LT 50 TD   | 75 kW      | 5-speed | 2010  | 1900/3500                            | 2990          | 5000                        | 6240               | 2050        | 2115         |      |
|  | LT 55 D  | 55 kW      | 5-speed | 1995  | 1950/3700                            | 3605          | 5600                        | 6240               | 2050        | 2140         |      |
|  | LT 55 TD   | 75 kW      | 5-speed | 2010  | 1950/3700                            | 3590          | 5600                        | 6240               | 2050        | 2140         |      |

The interior dimensions, load areas, load space dimensions, top speeds, maximum gradients and fuel consumption figures for the versions listed here can vary according to the special body fitted to the chassis.

<sup>7)</sup> Twin tyres  
<sup>8)</sup> Single tyres

<sup>1)</sup> Extra equipment may increase the vehicle's unladen weight,  
in which case the payload limit must be reduced accordingly.

All heights stated may vary by up to app. ± 30 mm depending on specification.



# Engines and transmissions / Weights / Dimensions

|   | Model                    | Engine  | Gearbox | Unladen weight <sup>1)</sup><br>with driver<br>kg | Axle load limits<br>front/rear<br>kg | Payload<br>kg | Gross weight<br>limit<br>kg | Overall dimensions |             |              |
|---|--------------------------|---------|---------|---|--------------------------------------|---------------|-----------------------------|--------------------|-------------|--------------|
|   |                          |         |         |   |                                      |               |                             | Length<br>mm       | Width<br>mm | Height<br>mm |
| <b>Chassis<br/>with<br/>double cab,<br/>wheelbase<br/>2950 mm</b> | LT 28                    | 66 kW   | 4-speed | 1670  | 1500/1680                            | 1130          | 2800                        | 5245               | 2040        | 2140         |
|   | LT 28                    | 66 kW   | 5-speed | 1670  | 1500/1680                            | 1130          | 2800                        | 5245               | 2040        | 2140         |
|   | LT 28 Cat.               | 69 kW   | 4-speed | 1670  | 1500/1680                            | 1130          | 2800                        | 5245               | 2040        | 2140         |
|   | LT 28 Cat.               | 69 kW   | 5-speed | 1670  | 1500/1680                            | 1130          | 2800                        | 5245               | 2040        | 2140         |
|   | LT 28 D                  | 51 kW   | 5-speed | 1725  | 1500/1680                            | 1075          | 2800                        | 5245               | 2040        | 2140         |
|   | LT 28 D                  | 57 kW   | 5-speed | 1725  | 1500/1680                            | 1075          | 2800                        | 5245               | 2040        | 2140         |
|   | LT 28 TD                 | 68 kW   | 5-speed | 1740  | 1500/1680                            | 1060          | 2800                        | 5245               | 2040        | 2140         |
|   | LT 28 TD                 | 80 kW   | 5-speed | 1740  | 1500/1680                            | 1060          | 2800                        | 5245               | 2040        | 2140         |
|   | LT 31                    | 66 kW   | 4-speed | 1700  | 1500/1940                            | 1500          | 3200                        | 5245               | 2040        | 2140         |
|   | LT 31                    | 66 kW   | 5-speed | 1700  | 1500/1940                            | 1500          | 3200                        | 5245               | 2040        | 2140         |
|   | LT 31 Cat.               | 69 kW   | 4-speed | 1700  | 1500/1940                            | 1500          | 3200                        | 5245               | 2040        | 2140         |
|   | LT 31 Cat.               | 69 kW   | 5-speed | 1700  | 1500/1940                            | 1500          | 3200                        | 5245               | 2040        | 2140         |
|   | LT 31 D                  | 51 kW   | 5-speed | 1755  | 1500/1940                            | 1445          | 3200                        | 5245               | 2040        | 2140         |
|   | LT 31 D                  | 57 kW   | 5-speed | 1755  | 1500/1940                            | 1445          | 3200                        | 5245               | 2040        | 2140         |
|   | LT 31 TD                 | 68 kW   | 5-speed | 1770  | 1500/1940                            | 1430          | 3200                        | 5245               | 2050        | 2085         |
|   | LT 31 TD                 | 80 kW   | 5-speed | 1770  | 1500/1940                            | 1430          | 3200                        | 5245               | 2050        | 2085         |
|   | LT 35 <sup>1)</sup>      | 66 kW   | 4-speed | 1755  | 1500/2350                            | 1745          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 <sup>2)</sup>      | 66 kW   | 4-speed | 1755  | 1500/2350                            | 1745          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 <sup>1)</sup>      | 66 kW   | 5-speed | 1755  | 1500/2350                            | 1745          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 <sup>2)</sup>      | 66 kW   | 5-speed | 1755  | 1500/2350                            | 1745          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 <sup>1)</sup> Cat. | 69 kW   | 4-speed | 1755  | 1500/2350                            | 1745          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 <sup>2)</sup> Cat. | 69 kW   | 4-speed | 1755  | 1500/2350                            | 1745          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 <sup>1)</sup> Cat. | 69 kW   | 5-speed | 1755  | 1500/2350                            | 1745          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 <sup>2)</sup> Cat. | 69 kW   | 5-speed | 1755  | 1500/2350                            | 1745          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 D <sup>1)</sup>    | 51 kW   | 5-speed | 1810  | 1500/2350                            | 1690          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 D <sup>2)</sup>    | 51 kW   | 5-speed | 1775  | 1500/2240                            | 1725          | 3500                        | 5245               | 2040        | 2140         |
|   | LT 35 D <sup>1)</sup>    | 57 kW   | 5-speed | 1810  | 1500/2350                            | 1690          | 3500                        | 5245               | 2050        | 2085         |
|   | LT 35 D <sup>2)</sup>    | 57 kW   | 5-speed | 1775  | 1500/2240                            | 1725          | 3500                        | 5245               | 2040        | 2140         |
|   | LT 35 TD <sup>1)</sup>   | 68 kW   | 5-speed | 1790  | 1500/2240                            | 1710          | 3500                        | 5245               | 2040        | 2140         |
|   | LT 35 TD <sup>2)</sup>   | 68 kW   | 5-speed | 1790  | 1500/2240                            | 1710          | 3500                        | 5245               | 2040        | 2140         |
|   | LT 35 TD <sup>1)</sup>   | 80 kW   | 5-speed | 1790  | 1500/2240                            | 1710          | 3500                        | 5245               | 2040        | 2140         |
|   | LT 35 TD <sup>2)</sup>   | 80 kW   | 5-speed | 1790  | 1500/2240                            | 1710          | 3500                        | 5245               | 2040        | 2140         |
|   | LT 40                    | 66 kW   | 5-speed | 1865  | 1900/2800                            | 2135          | 4000                        | 5245               | 2050        | 2100         |
|   | LT 40 D                  | 55 kW   | 5-speed | 1920  | 1900/2800                            | 2080          | 4000                        | 5245               | 2050        | 2100         |
|   | LT 40 TD                 | 75 kW   | 5-speed | 1935  | 1900/2800                            | 2065          | 4000                        | 5245               | 2050        | 2100         |
|   | LT 45                    | 66 kW   | 5-speed | 1965  | 1900/3500                            | 2635          | 4600                        | 5245               | 2050        | 2115         |
|   | LT 45 D                  | 55 kW   | 5-speed | 2020  | 1900/3500                            | 2580          | 4600                        | 5245               | 2050        | 2115         |
|   | LT 45 TD                 | 75 kW   | 5-speed | 2035  | 1900/3500                            | 2565          | 4600                        | 5245               | 2050        | 2115         |
|   | LT 50                    | 66 kW   | 5-speed | 1965  | 1900/3500                            | 3035          | 5000                        | 5245               | 2050        | 2115         |
|   | LT 50 D                  | 55 kW   | 5-speed | 2020  | 1900/3500                            | 2980          | 5000                        | 5245               | 2050        | 2115         |
| LT 50 TD  | 75 kW                    | 5-speed | 2035    | 1900/3500   | 2965                                 | 5000          | 5245                        | 2050               | 2115        |              |
| <b>Chassis<br/>with<br/>double cab,<br/>wheelbase<br/>3650 mm</b> | LT 40                    | 66 kW   | 5-speed | 2050  | 1900/2800                            | 1950          | 4000                        | 6180               | 2050        | 2115         |
|   | LT 40 D                  | 55 kW   | 5-speed | 2105  | 1900/2800                            | 1895          | 4000                        | 6180               | 2050        | 2115         |
|   | LT 40 TD                 | 75 kW   | 5-speed | 2120  | 1900/2800                            | 1880          | 4000                        | 6180               | 2050        | 2115         |
|   | LT 45                    | 66 kW   | 5-speed | 2050  | 1900/3500                            | 2550          | 4600                        | 6180               | 2050        | 2115         |
|   | LT 45 D                  | 55 kW   | 5-speed | 2105  | 1900/3500                            | 2495          | 4600                        | 6180               | 2050        | 2115         |
|   | LT 45 TD                 | 75 kW   | 5-speed | 2120  | 1900/3500                            | 2480          | 4600                        | 6180               | 2050        | 2115         |
|   | LT 50                    | 66 kW   | 5-speed | 2050  | 1900/3500                            | 2950          | 5000                        | 6180               | 2050        | 2115         |
|   | LT 50 D                  | 55 kW   | 5-speed | 2105  | 1900/3500                            | 2895          | 5000                        | 6180               | 2050        | 2115         |
|   | LT 50 TD                 | 75 kW   | 5-speed | 2120  | 1900/3500                            | 2880          | 5000                        | 6180               | 2050        | 2115         |
|   | LT 55 D                  | 55 kW   | 5-speed | 2105  | 1950/3700                            | 3495          | 5600                        | 6180               | 2050        | 2140         |
|   | LT 55 TD                 | 75 kW   | 5-speed | 2120  | 1950/3700                            | 3480          | 5600                        | 6180               | 2050        | 2140         |


The interior dimensions, load areas, load space dimensions, top speeds, maximum gradients and fuel consumption figures for the versions listed here can vary according to the special body fitted to the chassis.

<sup>1)</sup> Twin tyres  
<sup>2)</sup> Single tyres


<sup>1)</sup> Extra equipment may increase the vehicle's unladen weight, in which case the payload limit must be reduced accordingly.

All heights stated may vary by up to app. ± 30 mm depending on specification.




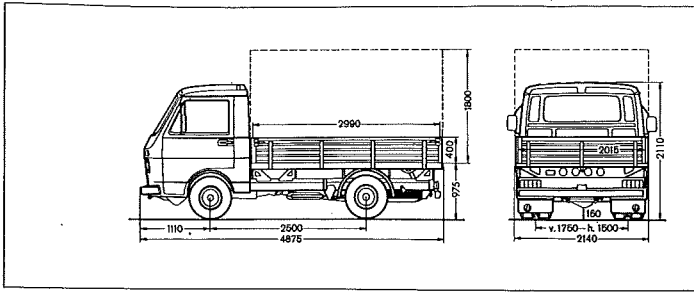


Pick-up LT 35

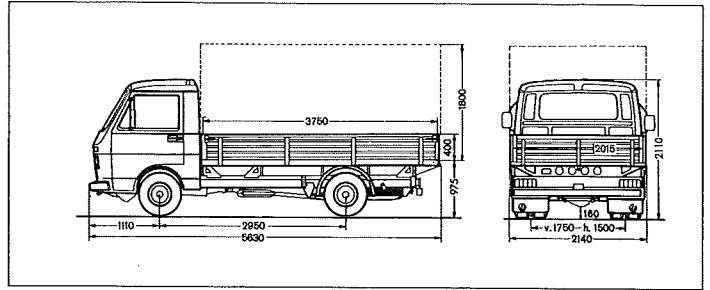


Pick-up LT 35

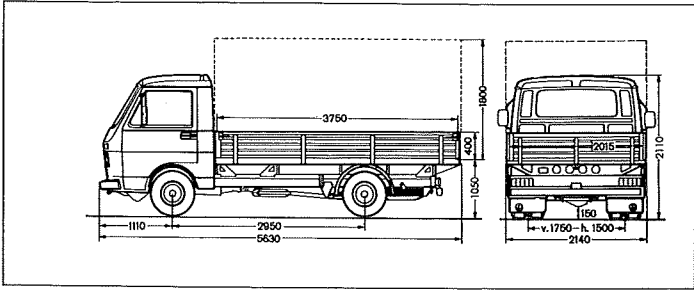


Pick-up LT 40/45/50/55

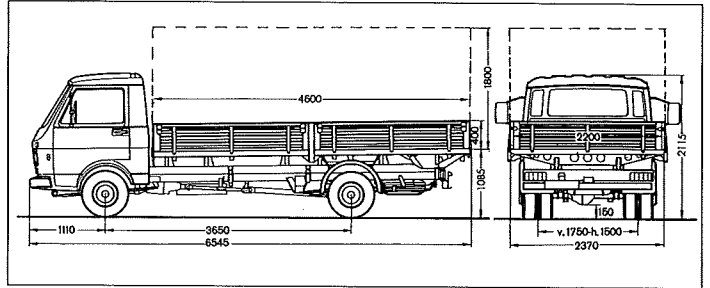


Pick-up LT 40/45/50/55

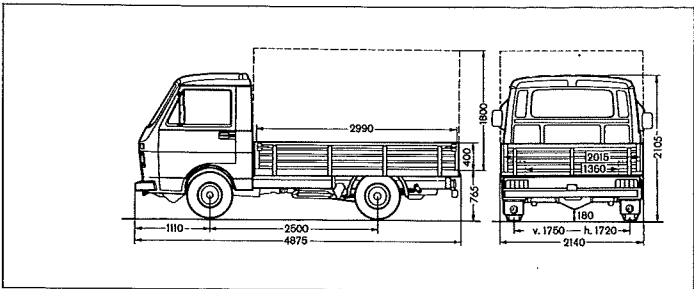


Low-loader LT 28/31/35

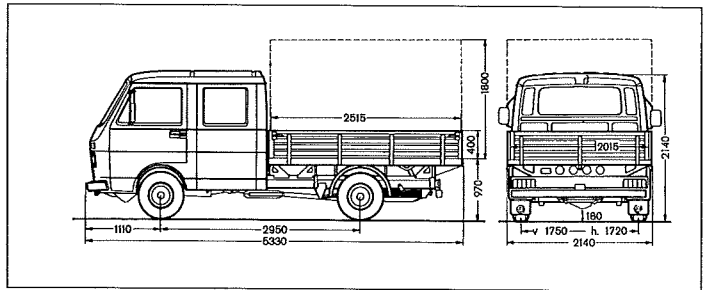


Double-cab pick-up LT 28/31/35

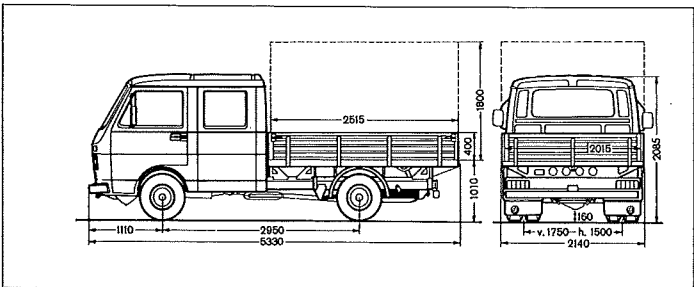


Double-cab pick-up LT 35

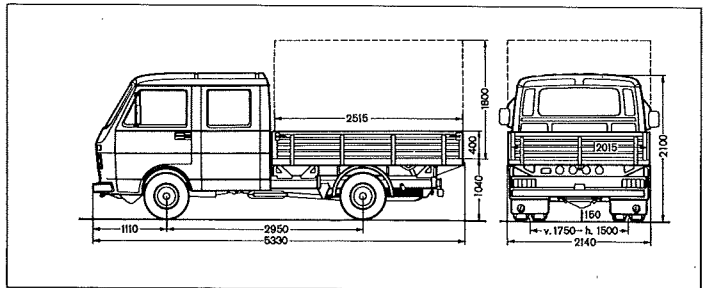


Double-cab pick-up LT 40/45/50/55

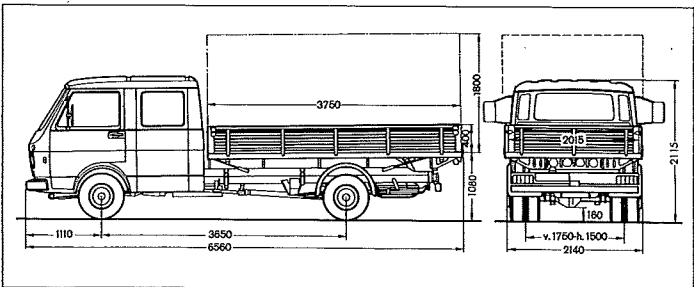


Double-cab pick-up LT 40/45/50/55

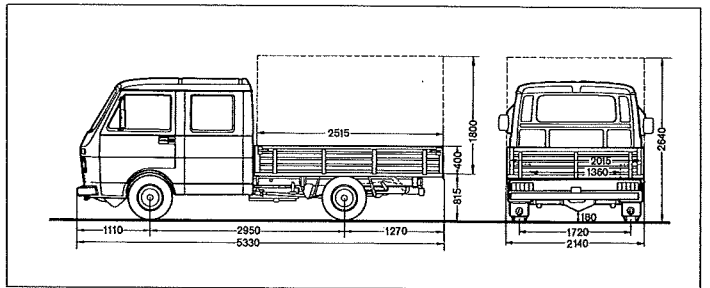

Low-loader with double-cab LT 28/31/35

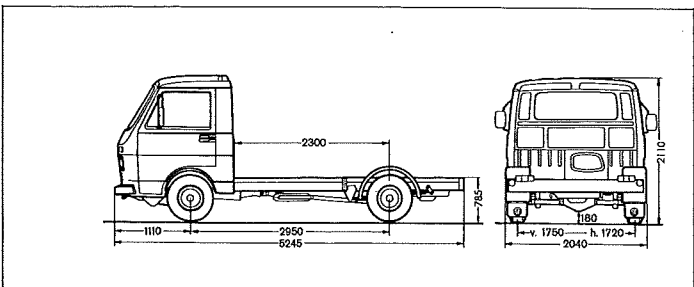

Chassis with cab LT 28/31/35

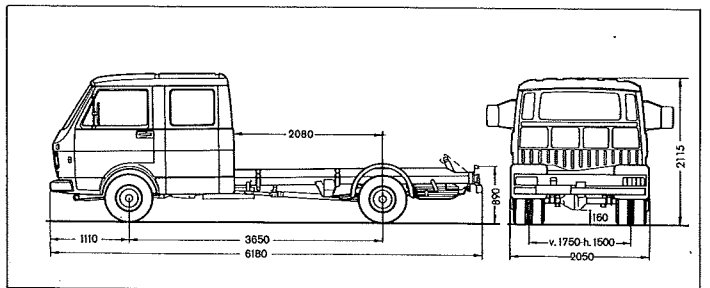

Chassis with double cab LT 40/45/50/55

## Optional equipment at extra charge

These items of equipment enable you to equip your vehicle to suit individual tastes and specific operating needs, in addition to the items included in the standard specifications.

### For all models:

Power steering  
Laminated safety glass windscreen  
Halogen fog lights  
Rear fog light  
Headlight cleaning system  
Pivoting vent windows in cab doors  
Steel-braced radial-ply winter tyres  
Undertray on front axle (LT 28/31/35 only)  
Towing coupling in front bumper (standard on LT 40/45/50/55)  
Anti-roll bars on front and rear axles (LT 35 only)  
Anti-roll bars on rear axle (LT 40–55 only)  
Up-rated anti-roll bars (LT 40–55 only)  
Up-rated front springs (LT 28/31/35 only)  
Up-rated rear springs (LT 28/31 only)  
Tandem brake servo (standard on LT 40 upwards with 2950 mm wheelbase and on LT 50/55)  
Wheel chock (standard on LT 40/45/50/55)  
Power take-off from engine or gearbox  
12 V, 300 A (63 Amp/h) battery (with spark-ignition engine only)  
12 V, 395 A (88 Amp/h) battery (with spark-ignition engine only)  
Max. 65 A or max. 90 A alternator  
Variable-height driver's seat (standard on LT 40/45/50/55)  
Heated driver's seat  
Specially sprung, variable-height driver's seat  
Adjustable separate front passenger's seat  
Two-passenger front bench seat  
Automatic seat belts for the two outer seats  
Add-on head restraints for each seat in cab  
Cloth seat upholstery instead of leatherette  
Anti-glare safety interior mirror  
Lock pin for steering (standard on Kombi)  
Storage trays on driver's and passenger's doors  
Padded fascia and lockable storage compartment lid  
Storage tray on engine cover  
Trip distance recorder and clock  
Tachograph to comply with European Community regulations (standard on LT 40/45/50/55)  
Telltale lamp for applied handbrake and low brake fluid level  
Intermittent wiper and automatic wash-wipe circuits  
12 V power socket on fascia  
Operating hours meter  
Revolution counter  
Auxiliary fuel-burning heater  
Electric ventilator/air extraction fan in roof  
Wheel covers (on LT 28/31 only)  
Complete radio installation  
Trailer towing coupling  
Clock  
Up-rated front axle for higher load capacity of 1650 kg  
Lashing points (for Delivery van, Pick-up and Double-cab pick-up)  
110 l fuel tank (not for Double-cab pick-up)  
Electronic tachograph

### For Delivery van/ High-roof delivery van only

Second sliding door  
Side panel without sliding door  
Side window in sliding door and opposite side panel  
Rear left and right side windows  
Windows in hinged rear doors  
Extra-high hinged rear doors (standard on High-roof delivery van with 2950 mm wheelbase)  
Hinged rear doors opening through 270°  
Roof lining and side panel trim for load area (no roof lining in High-roof delivery van)  
Rubber mat for load area (not with 2950 mm wheelbase)  
High-density floor of multiple-laminate hardwood veneer  
Various patterns of bulkheads behind driver's and front passenger's seat (not on Bus models)  
PVC strip curtain behind driver's seat (standard on LT 40/45)  
Single access step  
16" wheels with 195 R 16 C tyres

### For Kombi/High-roof Kombi only

Two-person or three-person bench seat with lap-only seat belts in main passenger area  
Add-on head restraints at all seats  
Side window in sliding door and opposite side panel  
Rubber mat for load/passenger area  
Extra-high hinged rear doors (only on High-roof Kombi)  
Ride-comfort suspension package  
Single access step

### For Pick-up/Double-cab pick-up/ Chassis with cab/ Chassis with scuttle and Chassis with double cab

Anti-roll bar at rear (for LT 40/45 Pick-up and Chassis)  
Front axle with 1900 kg load capacity (for LT 40 Pick-up only)  
Heated rear window  
Tensioning chain for drop sides (only for LT 35/40/45/50/55 Pick-up with 2950 mm and 3650 mm wheelbase)  
Plastic tilt and bows  
Variable-height plastic tilt and bows (for 4600 mm long platform only)  
Cables for rear tailboards (not for Low-loader pick-up)  
High-density floor (22 mm) instead of standard floor (not with 4600 mm platform)  
Ventilator flap in roof (not for Double-cab pick-up)  
Two access steps for Pick-up and Double-cab pick-up  
Marker lights

### For Double-cab pick-up only

Four-person bench seat with storage compartment  
4 lap-only seat belts (standard on LT 28)  
Cloth upholstery instead of leatherette  
Auxiliary fuel-burning heater  
Coat hooks, grab handle and storage box  
Sliding windows